

PROJECT:	DATE:
CAT. NO.:	TYPE:
NOTES	VOLTS:

GENERAL

Shallow profile fluorescent luminaire for surface or pendant mounting. Recommended for general area lighting. Suitable for continuous row installation.

CONSTRUCTION

Rigid body constructed from code gauge steel.

FINISH

Standard finish is baked white enamel.

SHIELDING


Clear acrylic prismatic wrap-around diffuser with ribbed sides for balanced light control; easily removable, no hardware to loosen.

ELECTRICAL

Instant start electronic ballast, 120V-50/60Hz. Other ballasts and voltages available upon request.

CERTIFICATIONS

CSA and/or UL approved.

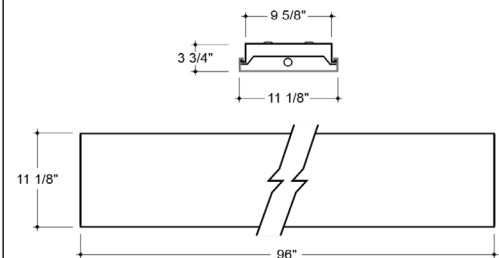

Ordering Information

LOPA	MODULE WIDTH	MODULE LENGTH	LAMPS	WATTS	SHIELDING	REFLECTOR	VOLTAGE	BALLAST / DRIVER
SERIES	11 = 11" 15 = 15"	4 = 4' 8 = 8'	2 = 2 3 = 3 4 = 4 5 = 5 6 = 6	28 = 28 (T5) 32 = 32 (T8) 54 = 54 (T5HO)	AC = Acrylic Wraparound WG = Wireguard WG - 12 = Wireguard and K12 lens	MR = Maximum Reveal 97%	120 = 120 Volts 277 = 277 Volts 347 = 347 Volts	IS = IS PRS = PRS RS = RS