

PROJECT:	DATE:
CAT. NO.:	TYPE:
NOTES	VOLTS:

### GENERAL

Surface-mounted fluorescent luminaire combines high performance and low brightness. The high efficiency and uniform light distribution reduce glare and eliminate shadows and hot spots. Clear acrylic prismatic diffuser (supplied as standard) is held within a hinged steel frame. Cam latch release opens frame for servicing; positive action, no springs. Retaining hook prevents the frame from disengaging accidentally when open. No visible hardware. 4" shallow profile.

### CONSTRUCTION

Rigid one-piece body constructed from code gauge steel.

### FINISH

Standard finish is high gloss white polyester powder coat paint. Baked white enamel.

### SHIELDING



No. K12 clear acrylic prismatic diffuser supplied as standard. Other options available.

### ELECTRICAL

Instant start electronic ballast, 120V-50/60Hz. Other ballasts and voltages available upon request.

### CERTIFICATIONS

CSA and/or UL approved.

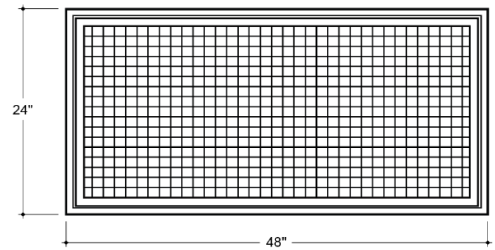

### Ordering Information

SERIES	SIZE	LAMPS	WATTS	SHIELDING	OPTIONS	REFLECTOR	VOLTAGE	BALLAST / DRIVER
LXHL-HB	24							
	24 = 2' x 4'	4 = 4 6 = 6	32 = 32 (T8) 54 = 54 (T5HO)	K12 = K12 lens SL = Silver Louver	G = Wireguard	BKWE = Baked white Enamel HT = Specular MR = Maximum Reveal 97%	120 = 120 Volts 277 = 277 Volts 347 = 347 Volts	IS = IS PRS = PRS RS = RS