

PROJECT:	DATE:
CAT. NO.:	TYPE:
NOTES	VOLTS:

GENERAL DESCRIPTION:

An elegant architectural fluorescent luminaire for T-grid ceilings. 3 3/8" shallow fixture profile. Fully lit center diffuser with two backlit sloped diffusers provide high quality soft diffused illumination for enhanced visual comfort and pleasing appearance. Diffuser assembly is held within hinged and latched frame. Cam latch release opens frame for easy servicing. No visible hardware. Drywall frame kit available.

CONSTRUCTION:

Rigid one-piece body constructed from code gauge steel.

SHIELDING:



Frosted acrylic side and center lenses.

ELECTRICAL:

Instant start electronic ballast, 120V-50/60Hz. Other ballasts and voltages available upon request.

CERTIFICATIONS:

CSA and/or UL approved.

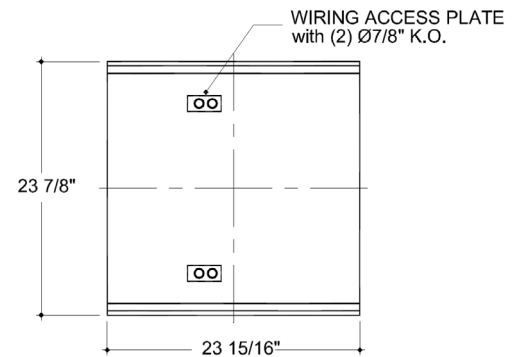

Ordering Information

SDLC-L3	22G			OPOP1			
SERIES	MODULE SIZE	LAMPS	WATTS	BASKET OPTION	DRYWALL OPTION	VOLTAGE	BALLAST
	2' x 2' T-bar ceiling	2 3	14 = 14W (T5) 24 = 24W (T5HO) 17 = 17W (T8)	OPOP1 = Frosted acrylic side and center lenses.	FK = Drywall Frame Kit *	120 277 347	IS PRS RS

* Ceiling opening: 24 3/4" x 24 3/4"
O/A flange: 25 3/8" x 25 1/4"