

PEERLUX<sup>®</sup>  
SERIES



CI

 **PEERLESS<sup>®</sup>**  
electric-électrique

INCEP<sup>®</sup>TION<sup>®</sup>  
PEERLESS CANADA

# CONCEPT

The CI is a **LED luminaire** for **surface** mounting for ceiling or **wall**.

As standard #12 clear prismatic acrylic wrap-around lens. With rigid body constructed from code gauge steel and spring-loaded and hinged end caps. Spring-loaded and hinged end caps make installation easy. Ideal for stairwells and other commercial environments. Row mounting available, consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*


Suitable for damp locations.




\*LED Five (5) year limited warranty. \*\*\*Complies with Buy American Act.

\*\*Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.



Specifications are subject to change. Please confirm latest specifications prior to placing order.

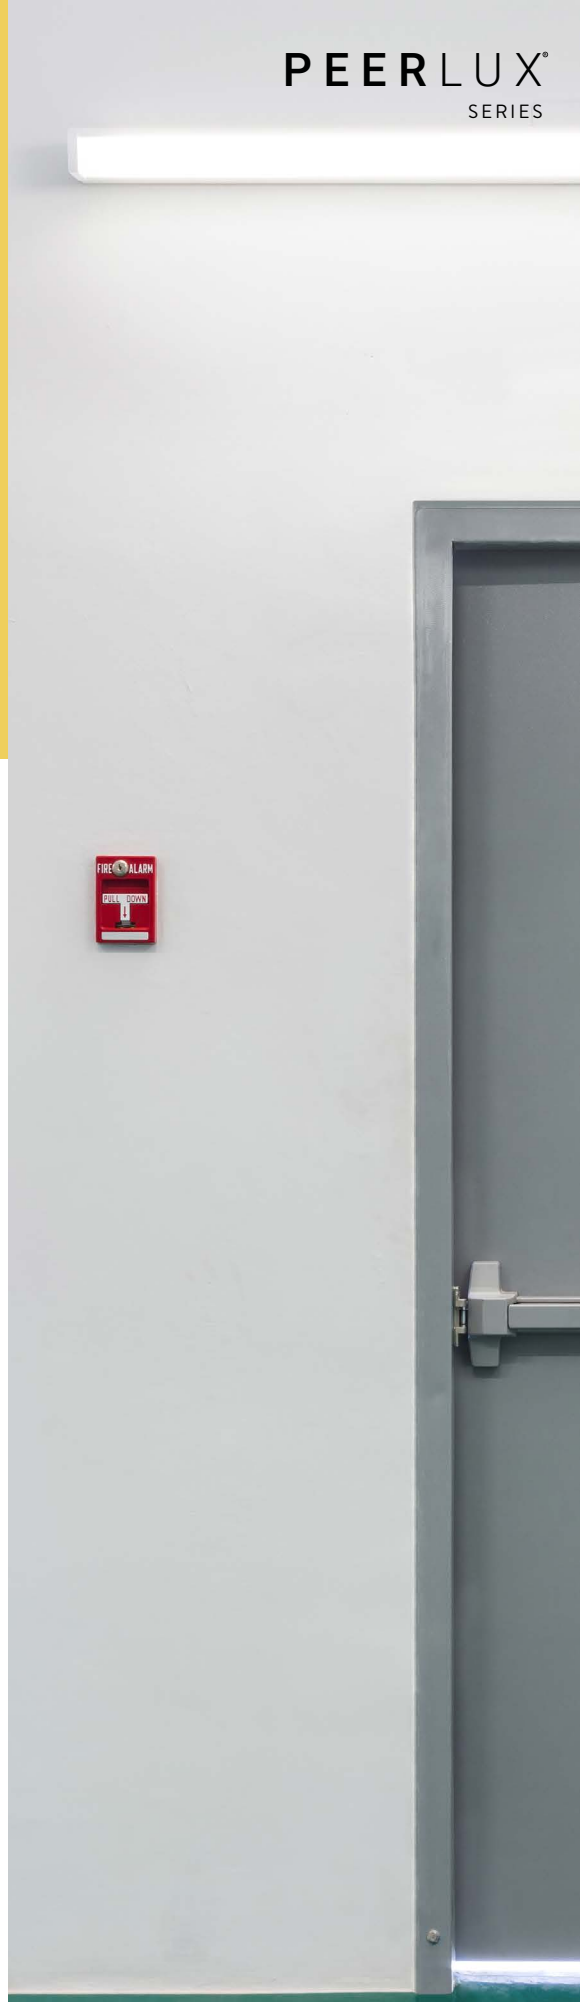

## STRUCTURE

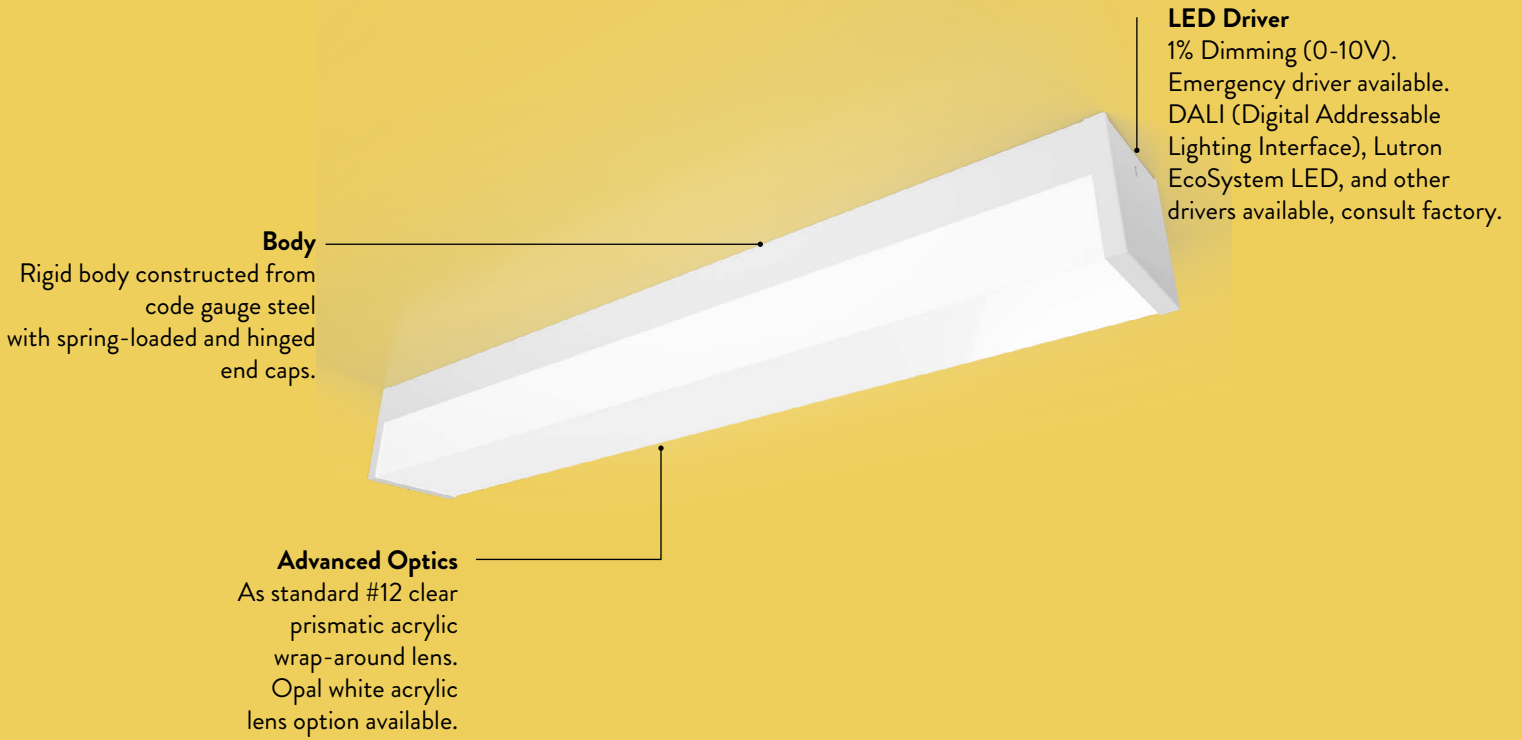


## MOUNTING

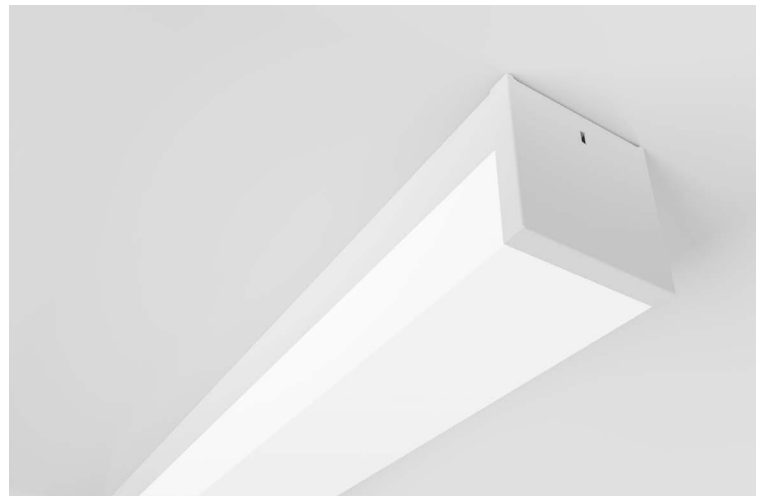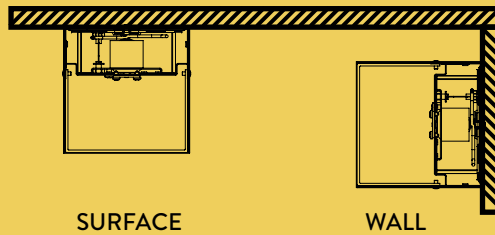




## WRAP AROUND LENS

As standard #12 clear prismatic acrylic wrap-around lens.  
With rigid body constructed from code gauge steel and spring-loaded and hinged end caps. Spring-loaded and hinged end caps make installation easy.

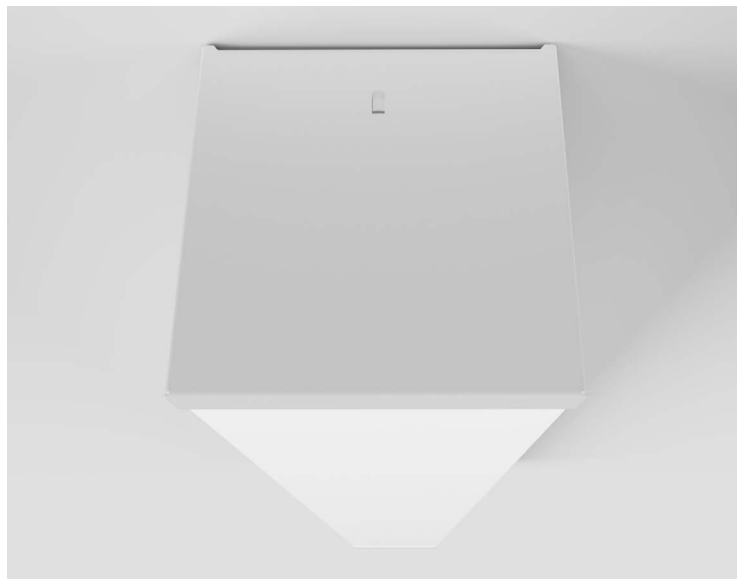

## PHOTOMETRIC DATA

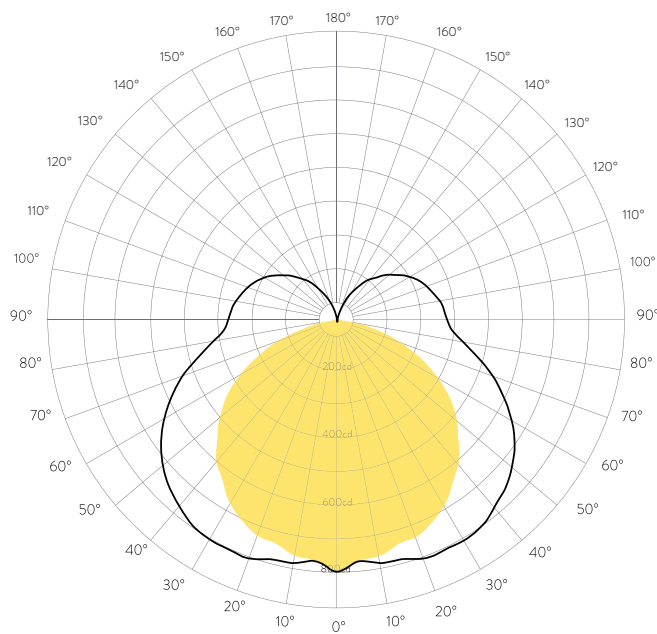

CI-4-40-40K

0°-180° █  
90°-270° █



## TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K, 4000K and 5000K




## COLOR

Standard finish is matte white polyester baked powder coat enamel. Matte grey and black available.



## DIMENSIONS


SIZE	L	W	H	MTG L	MTG W
2FT	24.00"	4.50"	4.50"	16.65"	1.90"
3FT	36.00"	4.50"	4.50"	28.05"	1.90"
4FT	48.00"	4.50"	4.50"	39.50"	1.90"

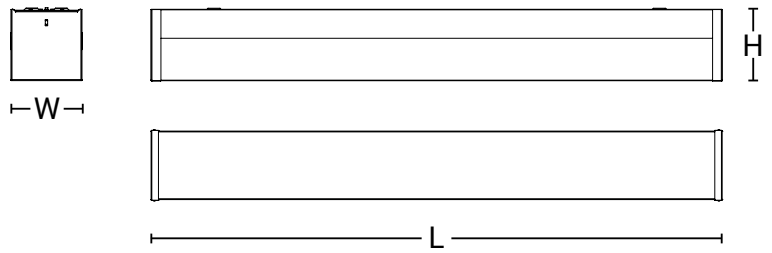

BOTTOM VIEW

## ORDERING INFORMATION

CI								
FIXTURE	LENGTH	LUMENS	CCT	SHIELDING	FINISH	CONTROLS *OPTIONAL*	DRIVER	
<b>CI =</b> CI. Wrap-Around Lens	<b>2 = 2ft</b>	<b>25 = 2500lm</b>	<b>30K = 3000K</b>	<b>C = #12 Clear</b> Prismatic Acrylic  <b>O = Opal White</b> Acrylic	<b>GLOSSY</b>  <b>W = White Housing</b>  <b>B = Black Housing</b>  <b>G = Grey Housing</b>	<b>OC = On/Off</b> Occupancy Control  <b>O5 = 100%-</b> 50% Hi/Low Occupancy Control	<b>MV =</b> Standard 120V-277V 1% Dimming (0-10V)  <b>347 =</b> Standard 347V Dimming (0-10V)	
		<b>32 = 3200lm</b>	<b>35K = 3500K</b>					
		<b>3 = 3ft</b>	<b>28 = 2800lm</b>					<b>40K = 4000K</b>
		<b>32 = 3200lm</b>	<b>50K = 5000K</b>					
		<b>36 = 3600lm</b>	<b>TW =</b> Tunable White					
		<b>4 = 4ft</b>	<b>32 = 3200lm</b>					<b>*Other CCT,</b> RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory
	<b>36 = 3600lm</b>							
	<b>40 = 4000lm</b>							
	<b>44 = 4400lm</b>							
	<b>50 = 5000lm</b>							
						<b>MATTE</b>  <b>WM = White Housing</b>  <b>BM = Black Housing</b>  <b>GM = Grey Housing</b>  <b>X =</b> other colours and finishes available, consult factory	<b>EM =</b> Emergency Driver  <b>X =</b> DALI, Lutron EcoSystem LED, and other drivers available, consult factory	



OFFICE:

255-438 Isabey  
St-Laurent, QC H4T 1V3  
T: 514.595.1671  
F: 514.595.4411

PRODUCTION:

2900 Loyalist Str.  
Cornwall, ON K6H 6C8  
T: 613.510.1268  
F: 613.510.1268

[info@peerless-electric.com](mailto:info@peerless-electric.com)  
Peerless-Electric.com