

PROJET:	DATE:
CAT. NO.:	TYPE:
NOTES	VOLTS:

### GENERAL

Recessed fluorescent luminaire for T-grid ceilings. 3 3/8" shallow profile. Clear acrylic prismatic diffuser (supplied as standard) is held within a hinged steel frame. Cam latch release opens frame for easy servicing; positive action, no springs. Retaining hook prevents the hinged frame from disengaging accidentally when open. No visible hardware. Drywall frame kit available.

### CONSTRUCTION

Rigid one-piece body constructed from code gauge steel.

### FINISH

Standard finish is baked white enamel.

### SHIELDING


No. 12 clear acrylic prismatic diffuser supplied as standard. Other options available.

### ELECTRICAL

Instant start electronic ballast, 120V-50/60Hz. Other ballasts and voltages available upon request.

### CERTIFICATIONS

CSA and/or UL approved.

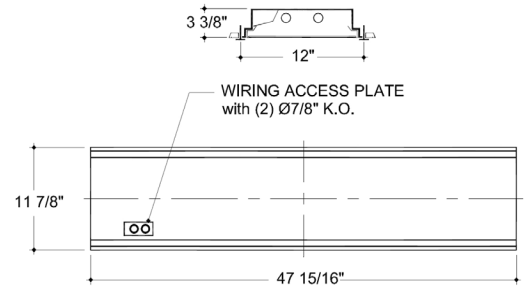

## Ordering Information

LACH3	14G							
SERIES	SIZE	LAMPS	WATTS	SHIELDING	REFLECTOR OPTION	DRYWALL OPTION	VOLTAGE	BALLAST / DRIVER
1' x 4' T-bar ceiling	1 2	28 = 28W (T5) 54 = 54W (T5HO) 32 = 32W (T8)	12 = #12 lens 12.125 = #12 lens (0.125") 19 = #19 lens P2A = P2A louver SLA = Acrylic Silver louver	M4 = Specular insert	FK = Drywall Frame Kit *	120 277 347	IS PRS RS	

\* Ceiling opening: 12 3/4" x 48 3/4"

O/A flange: 13 3/8" x 49 1/4"