

SVT



PEERLESS
electric-électrique

INCE|TION®
PEERLESS CANADA

CONCEPT

The SVT is a **LED luminaire** for **suspended** installation with aircraft cables or **surface** installation with mounting clips. Provides a superior quality of soft lighting as well as delivers a consistent light intensity that decelerates food discoloration. Frosted ribbed polycarbonate lens with one piece body construction with anti-UV and V2 fireproof PC material. Ideal for supermarkets and commercial environments.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

IP65. Suitable for wet locations.



*LED Five (5) year limited warranty. ****Complies with Buy American Act.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.

Specifications are subject to change. Please confirm latest specifications prior to placing order.

STRUCTURE


Canopy
Unique Canopy
works for all types
of junction boxes.

Advanced Optics
Frosted ribbed
polycarbonate.


LED Driver
1% Dimming (0-10V).
Emergency driver available.
DALI (Digital Addressable
Lighting Interface), Lutron
EcoSystem LED, and other
drivers available, consult factory.

Body
One piece body
construction with anti-
UV and V2 fireproof PC
material.

MOUNTING

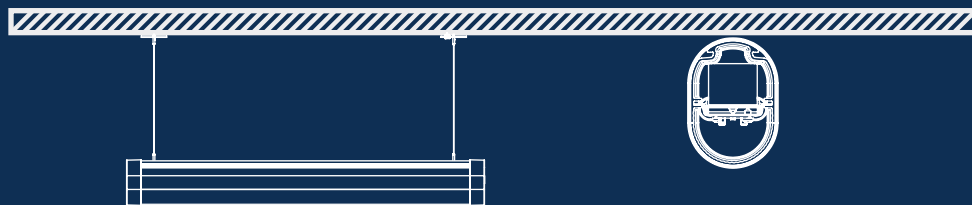

SUSPENDED / SURFACE

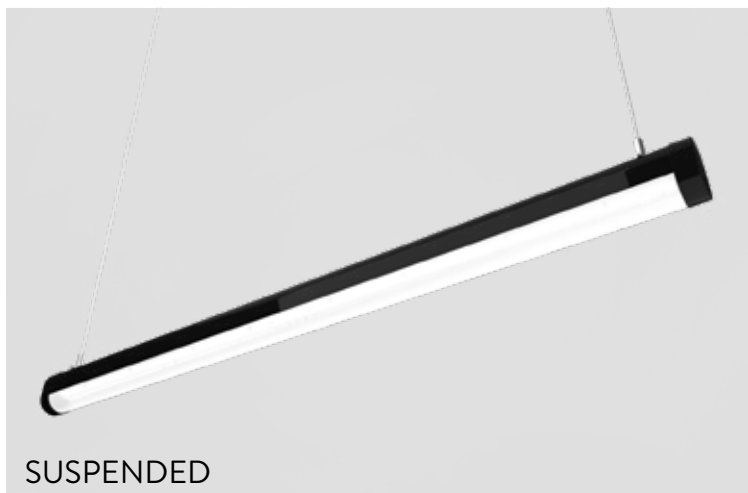


SUSPENDED



SURFACE



PHOTOMETRIC DATA

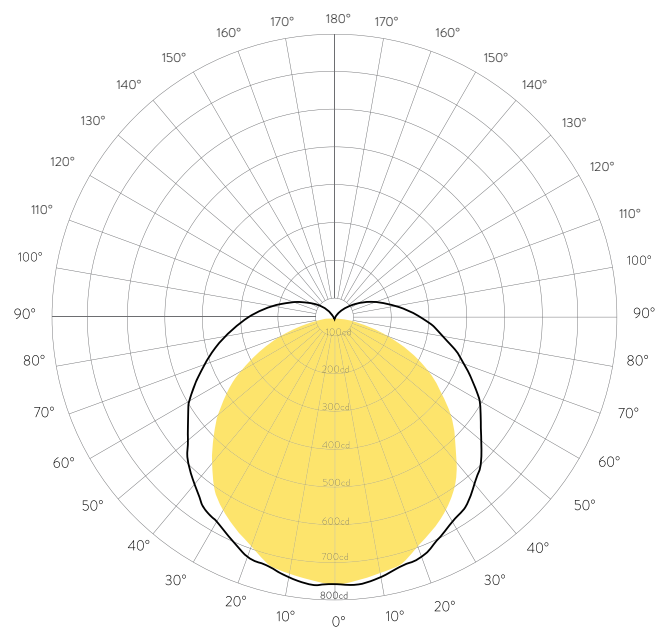

SVT-4-30-40K

0°-180° —
90°-270° —

Available in 3000K, 3500K, 4000K and 5000K preset CCT




OR

AS TUNABLE WHITE





CUSTOM COLORS

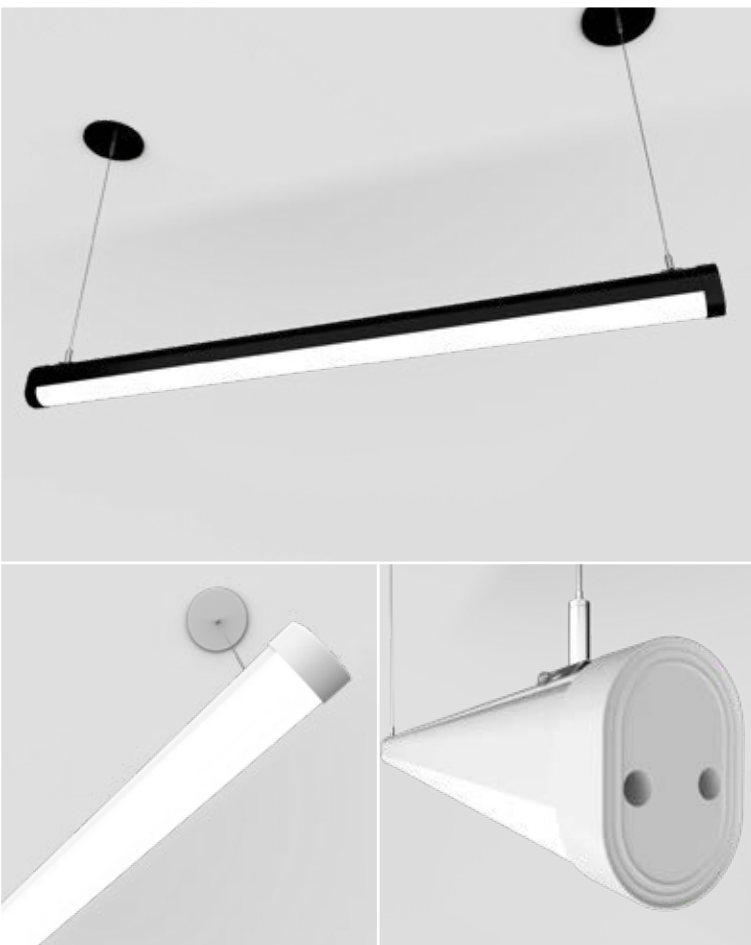

DIMENSIONS


SIZE	L	W	H	MTG L
2FT	24.00"	2.15"	3.10"	ADJUSTABLE
4FT	47.00"	2.15"	3.10"	ADJUSTABLE
6FT	69.00"	2.15"	3.10"	ADJUSTABLE
8FT	92.00"	2.15"	3.10"	ADJUSTABLE



BOTTOM VIEW

ORDERING INFORMATION

SVT				P2				
FIXTURE	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
SVT = Slim . Vapor . Tight	2 = 2ft	15 = 1500lm 30 = 3000lm	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K TW = Tunable White	P2 = Frosted Ribbed Polycarbonate	GLOSSY W = White Housing B = Black Housing	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) EM = Emergency Driver X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
	4 = 4ft	30 = 3000lm 60 = 6000lm				A5 = 60in Aircraft Cable	C2 = 6ft Cord	
	6 = 6ft	45 = 4500lm 90 = 9000lm				A8 = 96in Aircraft Cable	C4 = 9ft Cord	
	8 = 8ft	60 = 6000lm 120 = 12000lm	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory			A12 = 144in Aircraft Cable	C7 = 13ft Cord	
						SW = Side Wall Mounted, consult factory		



2900 Loyalist St.
Cornwall, ON
K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com