

NITO-04-xF

CONCEPT

The NITO-04-xF is a **LED luminaire** for **recessed** installation in a drywall ceiling. Standard shielding is a clear prismatic acrylic. Rigid body constructed from code gauge steel with symmetrical reflector. Ideal for commercial environments.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**


Suitable for damp locations.




*LED Five (5) year limited warranty. ***Complies with Buy American Act.
**Operating temperature: -20°C to +35°C / -4°F to +95°F, consult factory for operating temperatures outside the listed range.
Specifications are subject to change. Please confirm latest specifications prior to placing order.




STRUCTURE

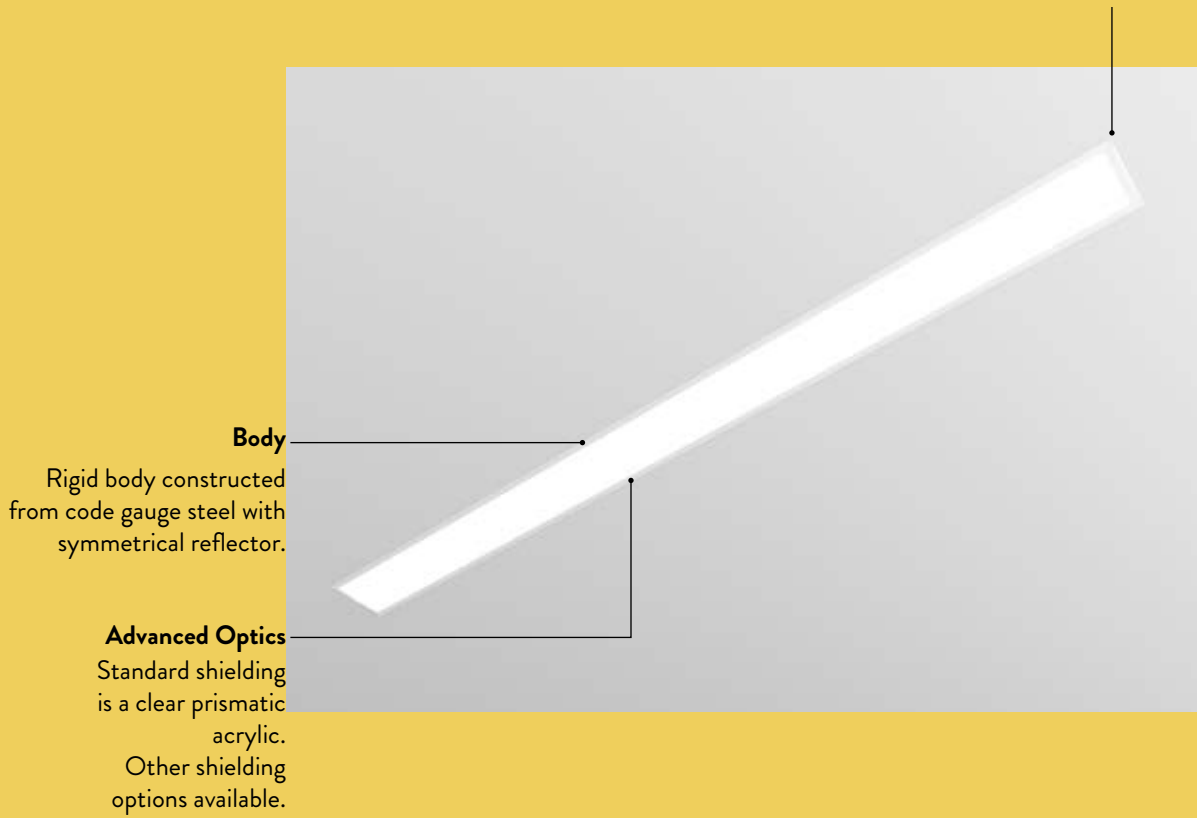

MOUNTING



RECESSED

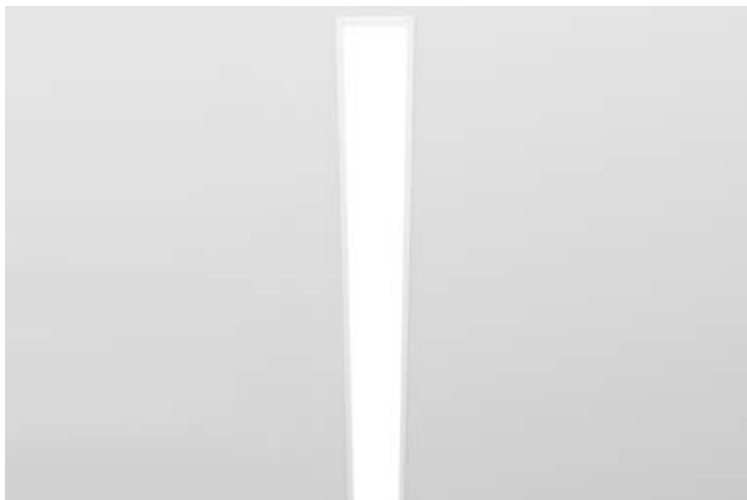




ELEGANT CLEAN DESIGN

Using advanced LED engines, it provides direct spread downlight, delivering both efficient and comfortable illumination.




PHOTOMETRIC DATA

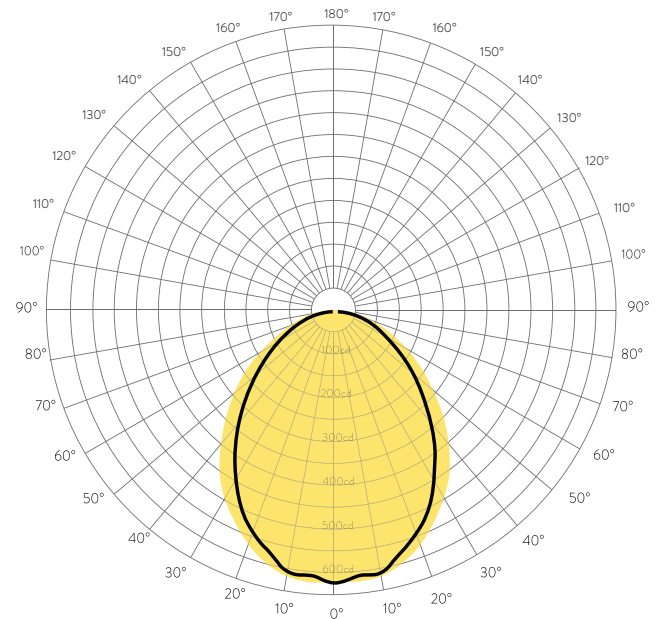

NITO-04-xF-40-30K

0°-180° █
90°-270° █

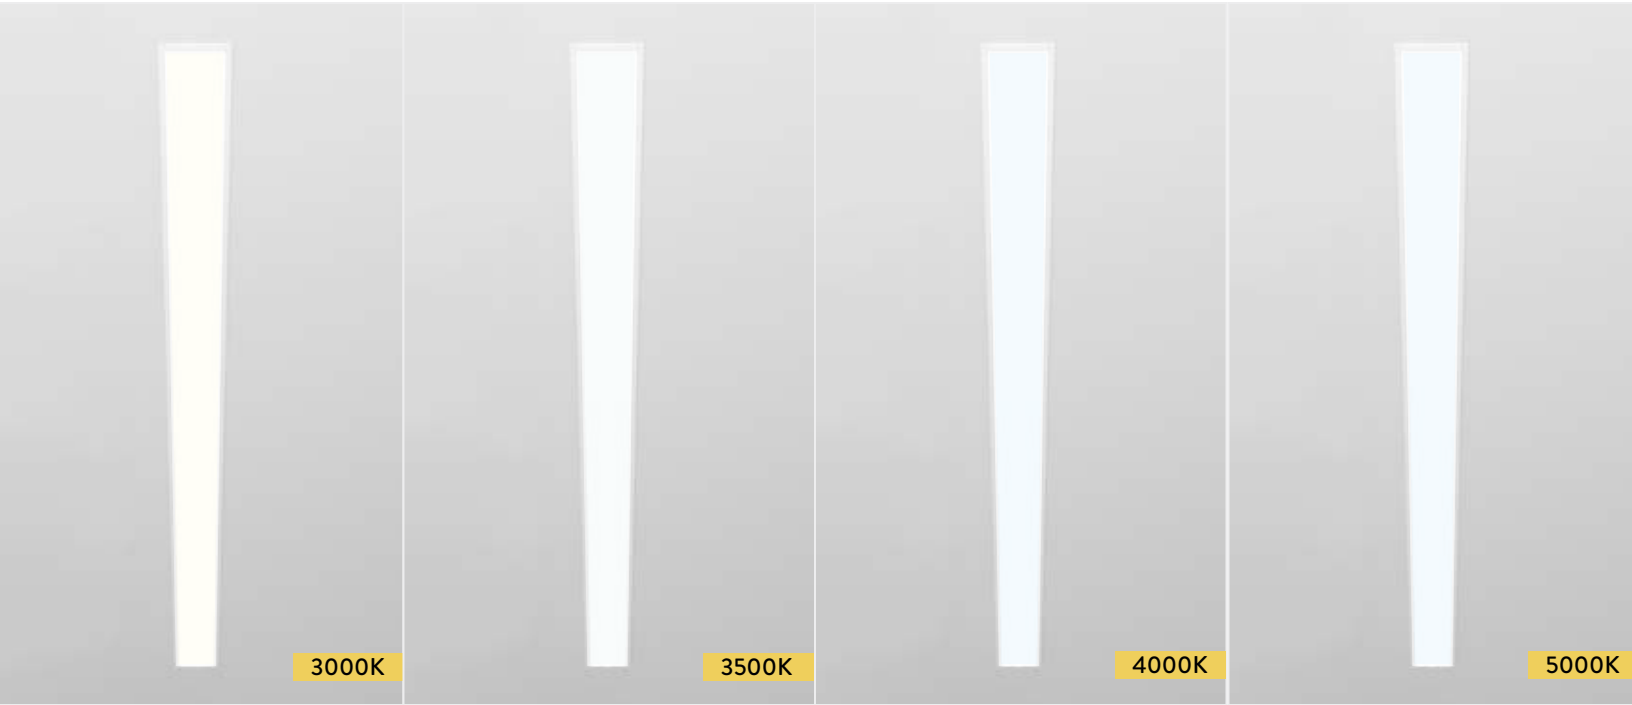

TUNABLE WHITE FUNCTION OPTIONS

Available in 3000K, 3500K, 4000K and 5000K

COLOR


Standard finish is matte white polyester baked powder coat enamel. Matte grey and black available.






DIMENSIONS

SIZE	L	W	H
2F	25.00"	3.75"	3.40"
4F	49.00"	3.75"	3.40"
6F	73.00"	3.75"	3.40"
8F	97.00"	3.75"	3.40"

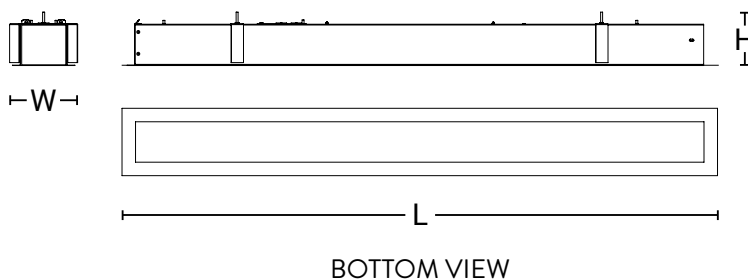

ORDERING INFORMATION

NITO	WIDTH	SIZE	LUMENS	CCT	SHIELDING	DRIVER
NITO = Narrow. Flange	03 = 3" 04 = 4" 06 = 6"	2F = 2ft Flange	20 = 2000lm	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	12 = Clear Prismatic Acrylic 12F = Frosted Prismatic Acrylic FA = Flat Frosted Acrylic FOA = Flat Opal Acrylic	MV = Standard 120V-277V 1% Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) EM = Emergency Driver X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		4F = 4ft Flange	32 = 3200lm 40 = 4000lm	TW = Tunable White	12P = Clear Prismatic Polycarbonate 0.125in THK	
		6F = 6ft Flange	48 = 4800lm 60 = 6000lm	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory	125 = Clear Prismatic Acrylic 0.125in THK	
		8F = 8ft Flange	64 = 6400lm 80 = 8000lm 96 = 9600lm			



OFFICE:

255-438 Isabey
St-Laurent, QC H4T 1V3
T: 514.595.1671
F: 514.595.4411

PRODUCTION:

2900 Loyalist Str.
Cornwall, ON K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com