

PROJECT:  
 CAT.NO:  
 NOTES:

DATE:  
 TYPE:  
 VOLTS:

2019-04-29

# RQ1

CAT NO: RQ1-0X-XX-4-XX-XXK-X-MV

## CONFIGURATION

OPENING: N/A  
 LENGTH: 4 = 4'  
 DISTRIBUTION: N/A  
 LUMENS: N/A  
 CCT: N/A  
 FINISH: N/A  
 DRIVER: MV = Standard 120V-277V Dimming (0-10v)

## TECHNICAL DATA

LUMENS: N/A/Im  
 CCT: N/AK  
 WATTAGE: N/AW  
 EFFICACY: N/A/Im/W



Approved to UL1598 and CSA C22.2 No.250 standards  
 \*LED Five (5) year limited warranty.  
 \*\*Not all available products are DLC qualified. Check the DLC Qualified Products List at designlights.org to confirm which versions are qualified.


## ANATOMY

### DIE-FORMED STEEL HOUSING

High gloss white polyester baked powder coat enamel

### HIGH PERFORMANCE LENS

Frosted acrylic lens down and prismatic lens up (if required) supplied as standard

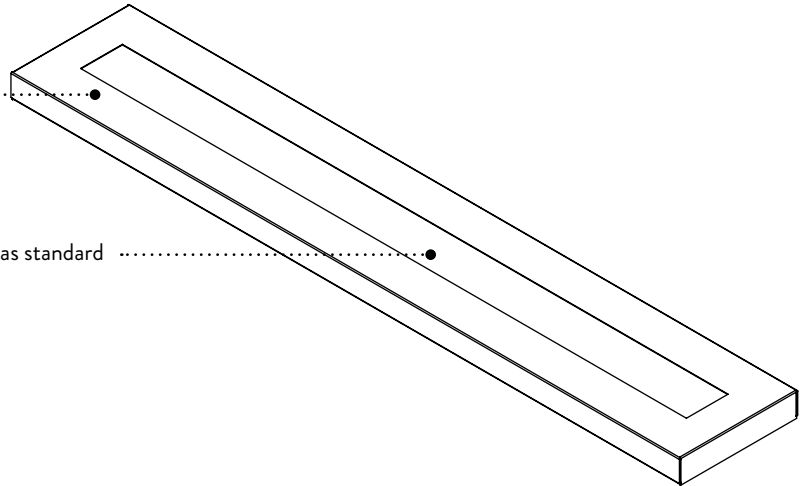


## SECTION VIEW

### LED DRIVER

Dimming 0-10V

### LED LIGHT ENGINE


Mounted on internal high reflectance white painted reflector

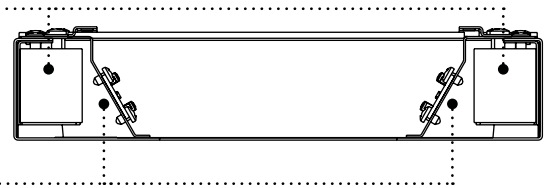


## DIMENSIONS

SIZE	L	W	H
4FT	44.00"	8.50"	1.65"

MTG L	MTG W
41.00"	4.25"

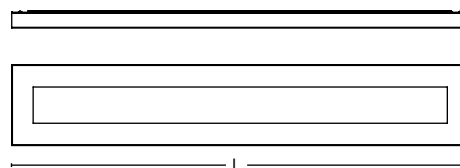

BOTTOM VIEW

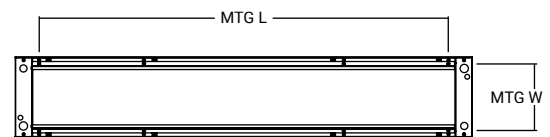

TOP VIEW