

PROJECT:
 CAT.NO:
 NOTES:

DATE:
 TYPE:
 VOLTS:

2019-04-29

RQ2

CAT NO: RQ2-4-6U4-48-40K-B-MV

CONFIGURATION

LENGTH: 4 = 4'
 DISTRIBUTION: N/A
 LUMENS: N/A
 CCT: N/A
 FINISH: N/A
 DRIVER: MV = Standard 120V-277V Dimming (0-10v)

TECHNICAL DATA

LUMENS: N/A/Im
 CCT: N/AK
 WATTAGE: N/AW
 EFFICACY: N/A/Im/W



Approved to UL1598 and CSA C22.2 No.250 standards
 *LED Five (5) year limited warranty.
 **Not all available products are DLC qualified. Check the DLC Qualified Products List at designlights.org to confirm which versions are qualified.

ANATOMY


HIGH PERFORMANCE LENS

Frosted acrylic lens down and prismatic.....
 lens up (if required) supplied as standard

DIE-FORMED STEEL HOUSING

Standard finish is high gloss white polyester baked powder coat enamel

*Other colours available. Consult factory.

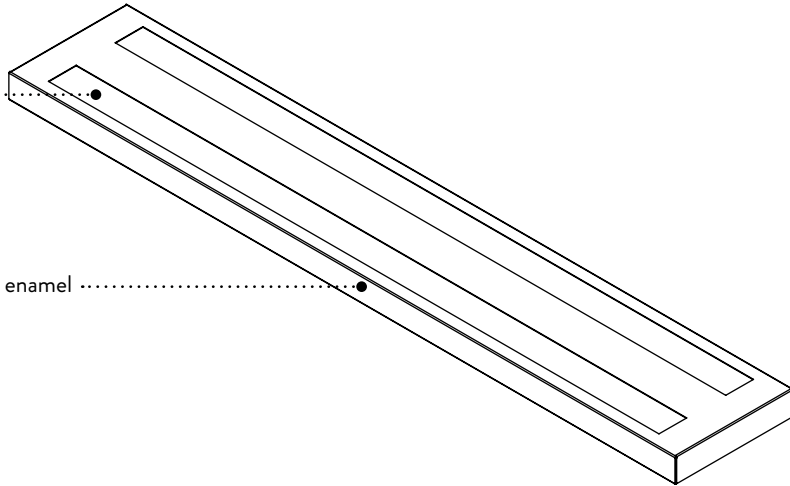


SECTION VIEW

LED DRIVER

Dimming 0-10V.....

LED LIGHT ENGINE



Mounted on internal high reflectance white painted reflector

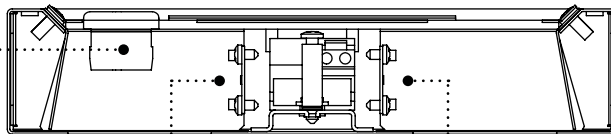

DIMENSIONS

SIZE	L	W	H
4FT	44.00"	8.50"	1.65"

MTG L	MTG W
41.00"	4.25"

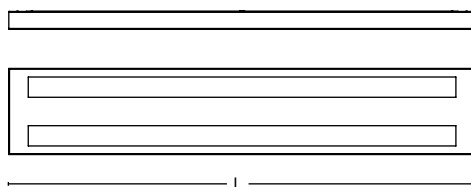

BOTTOM VIEW



TOP VIEW