

PROJECT:  
CAT.NO:  
NOTES:

DATE:  
TYPE:  
VOLTS:

**ARCLUX**  
SERIES

# LDXI

Linear . Direct . Indirect



SUSPENDED



SURFACE





WALL MOUNTED

## GENERAL DESCRIPTION

**LED luminaire** for **suspended** (with aircraft cables) or **surface** or **wall mounted** installation. Features a minimalistic and clean design providing a superior quality of lighting.

Ideal for commercial or architectural environments.

Row mounting available, consult factory.

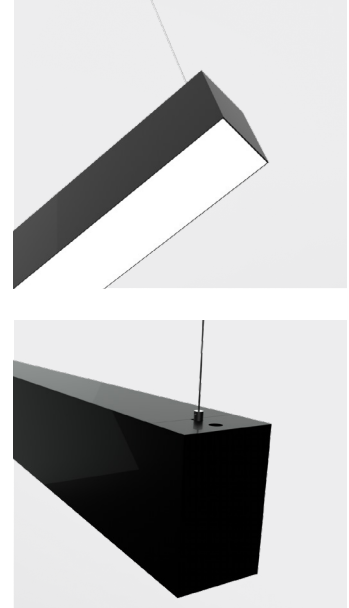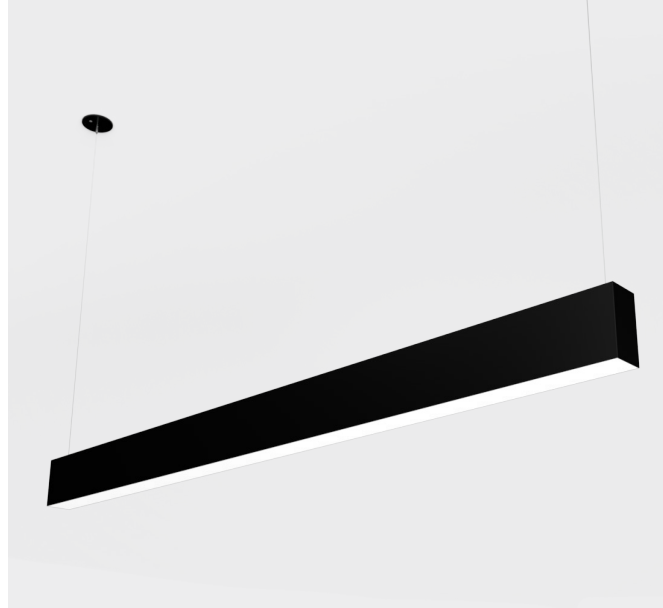

2019-05-09

## CONSTRUCTION

Extruded aluminum body.  
Protective dust top cover available, consult factory.

## SHIELDING

Snap-in flat frosted acrylic lens.

## FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

## ELECTRICAL

3000K 3500K 4000K 5000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.  
Other dimming options, lumen options, 90CRI and lengths available.  
Consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\*  
Suitable for damp locations.



\*LED Five (5) year limited warranty.  
\*\*Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

Specifications are subject to change.  
Please confirm latest specifications prior to placing order.

## ORDERING INFORMATION

LDXI					FA				
WIDTH	DISTRIBUTION	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING <small>*OPTIONAL*</small>	POWER CORD <small>*OPTIONAL*</small>	DRIVER
40 = 40mm (1.57")	<b>5U5</b> = 50% Up / 50% Down	<b>2</b> = 2ft <b>4</b> = 4ft	<b>50</b> = 500lm/ft <b>80</b> = 800lm/ft <b>100</b> = 1000lm/ft <b>120</b> = 1200lm/ft <b>150</b> = 1500lm/ft <small>*not applicable for direct light distribution</small>	<b>30K</b> = 3000K <b>35K</b> = 3500K <b>40K</b> = 4000K <b>50K</b> = 5000K	<b>FA</b> = Snap-in Flat Frosted Acrylic	<b>GLOSSY</b> <b>W</b> = White Housing <b>B</b> = Black Housing <b>G</b> = Grey Housing <b>MATTE</b> <b>WM</b> = White Housing <b>BM</b> = Black Housing <b>GM</b> = Grey Housing  <small>*other colours and finishes available, consult factory</small>	<b>A4</b> = 48in Aircraft Cable <b>A5</b> = 60in Aircraft Cable <b>A8</b> = 96in Aircraft Cable <b>A12</b> = 144in Aircraft Cable <b>SW</b> = Side Wall Mount Kit (2 brackets) <b>SM</b> = Surface Mounted	<b>C1</b> = 5ft Cord <b>C2</b> = 6ft Cord <b>C4</b> = 9ft Cord <b>C7</b> = 13ft Cord  <small>*other cords and row mounting options available, consult factory</small>	<b>MV</b> = Standard 120V-277V Dimming (0-10V) <b>347</b> = Standard 347V Dimming (0-10V)  <small>*emergency driver available, consult factory</small>

PROJECT:  
 CAT.NO:  
 NOTES:

DATE:  
 TYPE:  
 VOLTS:

# LDXI

## DIMENSIONS

2019-04-10


SIZE LDXI-40	L	W	H	MTG L	MTG W
2ft	26.00"	1.55"	4.70"	21.65"	0.80"
4ft	48.20"	1.55"	4.70"	45.75"	0.80"
6ft	72.40"	1.55"	4.70"	69.80"	0.80"
8ft	96.20"	1.55"	4.70"	93.90"	0.80"

SIZE LDXI-60	L	W	H	MTG L	MTG W
2ft	26.00"	2.35"	3.40"	ADJUSTABLE	1.20"
4ft	48.20"	2.35"	3.40"	ADJUSTABLE	1.20"
6ft	72.40"	2.35"	3.40"	ADJUSTABLE	1.20"
8ft	96.20"	2.35"	3.40"	ADJUSTABLE	1.20"


SIZE LDXI-95	L	W	H	MTG L	MTG W
2ft	26.00"	3.75"	5.90"	20.50"	1.85"
4ft	48.20"	3.75"	5.90"	44.55"	1.85"
6ft	72.40"	3.75"	5.90"	68.60"	1.85"
8ft	96.20"	3.75"	5.90"	92.65"	1.85"

## SIZES


### 2FT

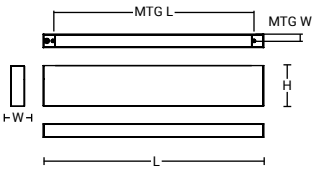

### 6FT

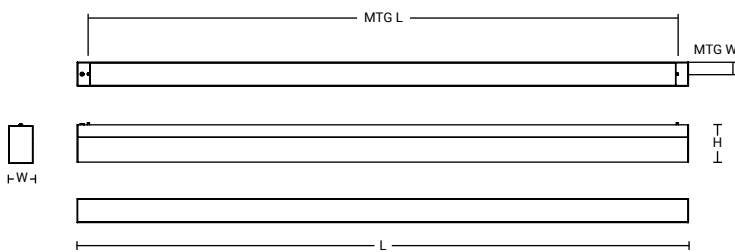

### 4FT

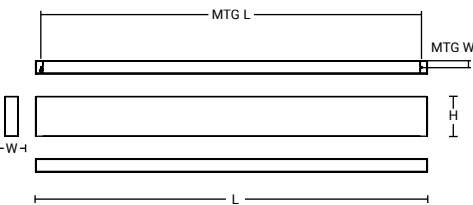

### 8FT



\*Different widths available for the same model