

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

ARCLUX[®]
SERIES

LDXR

Linear . Direct . Recessed



RECESSED


GENERAL DESCRIPTION

LED luminaire for **recessed** installation.

Features a minimalistic and clean design providing a superior quality of lighting.

Ideal for commercial or architectural environments.

Row mounting available, consult factory.

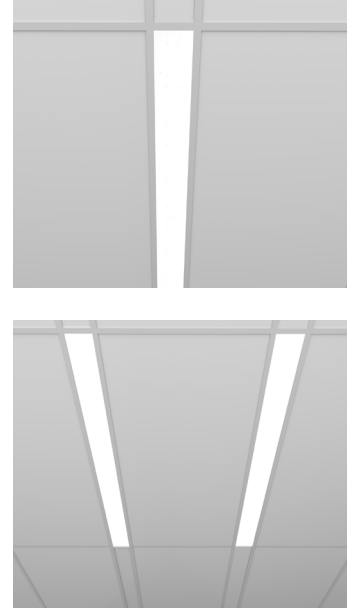

2019-05-09

CONSTRUCTION

Extruded aluminum body.

FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.



*LED Five (5) year limited warranty.

**Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

SHIELDING

Snap-in flat frosted acrylic lens.

ELECTRICAL

3000K 3500K 4000K 5000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.
Other dimming options, lumen options, 90CRI and lengths available.
Consult factory.

Specifications are subject to change.
Please confirm latest specifications prior to placing order.

ORDERING INFORMATION

LDXR						FA	
WIDTH	LENGTH	MOUNTING	LUMENS	CCT	SHIELDING	DRIVER	
40 = 40mm (1.57")	4 = 4ft 8 = 8ft	T = Trim *T-Bar and Drywall	80 = 800lm/ft	30K = 3000K	FA = Snap-in Flat Frosted Acrylic	MV = Standard 120V-277V Dimming (0-10V)	
60 = 60mm (2.36)		TL = Trimless *Drywall	100 = 1000lm/ft	35K = 3500K		347 = Standard 347V Dimming (0-10V)	
95 = 95mm (3.74")			120 = 1200lm/ft	40K = 4000K		*emergency driver available, consult factory	
				50K = 5000K			

LDXR

DIMENSIONS

2019-04-10

LDXR-40

SIZE	L	W	H	MTG L	MTG W
4FT	47.75"	1.55"	4.70"	48.00"	2.50"
8FT	95.75"	1.55"	4.70"	96.00"	2.50"


LDXR-60

4FT	47.75"	2.35"	3.40"	48.00"	3.25"
8FT	95.75"	2.35"	3.40"	96.00"	3.25"

LDXR-95

4FT	47.75"	3.75"	5.90"	48.00"	4.75"
8FT	95.75"	3.75"	5.90"	96.00"	4.75"


SIZES

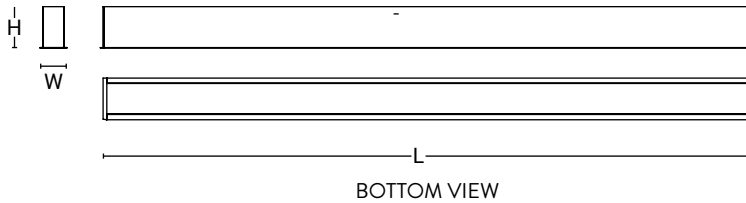

*Dimensions for 4ft model. See www.peerless-electric.com for all other dimensions.


TRIM T-BAR CEILING CUT OUT SIZES

SIZE	W
LDXR-40	2.50"
LDXR-60	3.25"
LDXR-95	4.75"

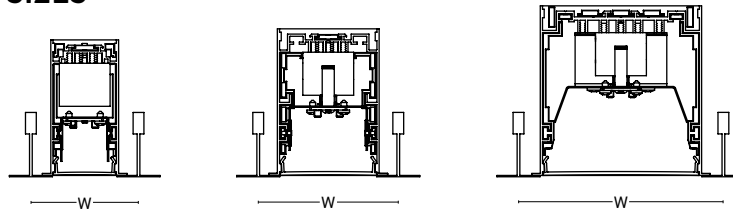

TRIM DRY WALL CUT OUT SIZES

SIZE	W
LDXR-40	1.75"
LDXR-60	2.50"
LDXR-95	4.00"

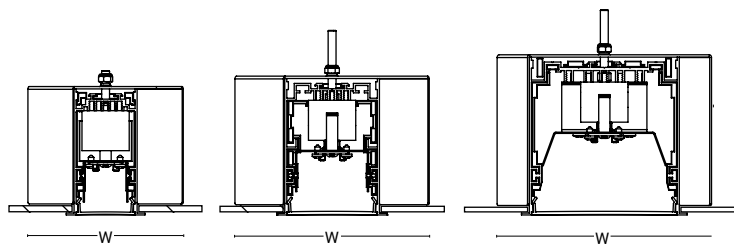

TRIMLESS DRY WALL CUT OUT SIZES

SIZE	W
LDXR-40	1.57"
LDXR-60	2.36"
LDXR-95	3.74"

