

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

NITO-04-xG

Narrow / T-Grid




RECESSED

GENERAL DESCRIPTION

LED luminaire for recessed installation in an exposed 15/16" T-grid ceiling.

Plaster frame kit available, consult factory.

Ideal for commercial environments.

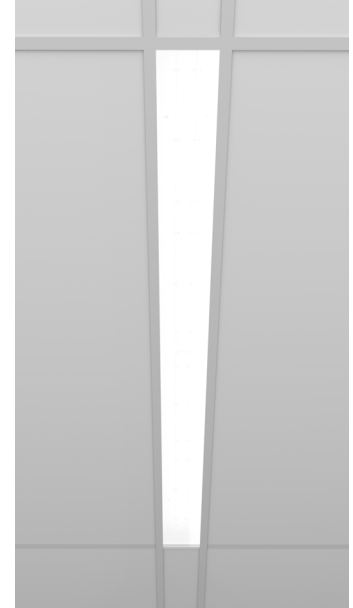

2019-05-09

CONSTRUCTION

Rigid body constructed from code gauge steel with symmetrical reflector.

FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.



*LED Five (5) year limited warranty.

**Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

SHIELDING

Standard shielding is a clear prismatic acrylic. Other lens options available.

ELECTRICAL

3000K 3500K 4000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.
Other dimming options, lumen options, 90 CRI and lengths available.
Consult factory.

Specifications are subject to change.
Please confirm latest specifications prior to placing order.

ORDERING INFORMATION

NITO	04					
WIDTH	SIZE	LUMENS	CCT	SHIELDING	DRIVER	
04 = 4"	2G = 2ft T-Grid	20 = 2000lm	30K = 3000K	12 = Clear Prismatic Acrylic	MV = Standard 120V-277V Dimming (0-10V)	
			35K = 3500K			
			40K = 4000K			
	4G = 4ft T-Grid	32 = 3200lm	19 = Clear Prismatic #19 Acrylic	19F = Frosted Prismatic Acrylic	347 = Standard 347V Dimming (0-10V)	
		40 = 4000lm				
		60 = 6000lm				
	6G = 6ft T-Grid	48 = 4800lm	FA = Flat Frosted Acrylic	FOA = Flat Opal Acrylic	*emergency driver available, consult factory	
		60 = 6000lm				
		96 = 9600lm				
	8G = 8ft T-Grid	64 = 6400lm	12P = Clear Prismatic Polycarbonate 0.125in THK	125 = Clear Prismatic Acrylic 0.125in THK		
		80 = 8000lm				
		96 = 9600lm				

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

NITO-04-xG


DIMENSIONS

2019-04-29


SIZE	L	W	H
2G	23.75"	3.75"	3.40"
4G	47.75"	3.75"	3.40"
6G	71.75"	3.75"	3.40"
8G	95.75"	3.75"	3.40"

SIZES


2G

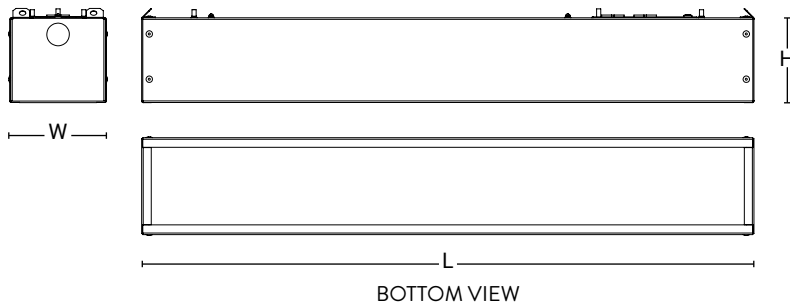

4G

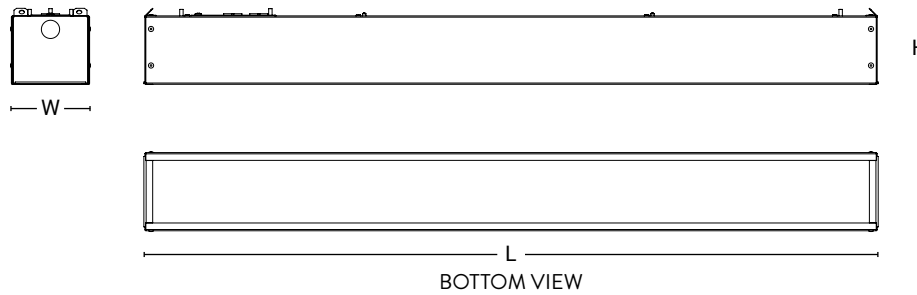

6G

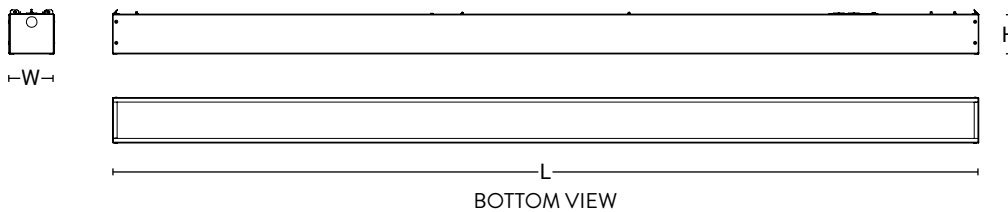

8G

