

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

EVALUX
SERIES

PNLP

Panel. P




GENERAL DESCRIPTION

LED luminaire for **recessed**, **surface** or **suspended** installation with optional surface mount box and v-hooks, consult factory.

Featuring a low profile with high performance, using the most advanced LED technology by delivering up to 130lm/W without glare.

Ideal for commercial environments.

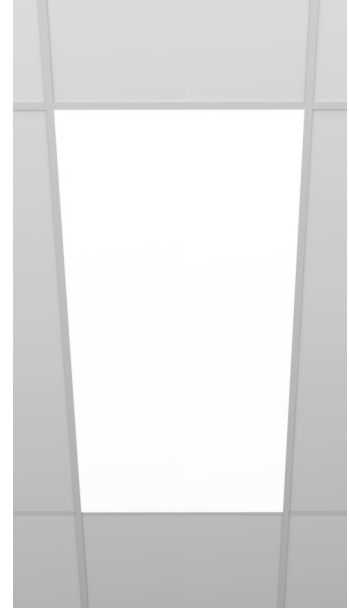

2019-05-09

CONSTRUCTION

Aluminum extrusion, incorporating light thermal management with passive cooling.

FINISH

High gloss white polyester baked powder coat enamel.



CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.



*LED Five (5) year limited warranty.
**Normal temperature: -20 degrees Celsius to +25 degrees Celsius.
***Not all available products are DLC qualified. Check the DLC Qualified Products List at designlights.org to confirm which versions are qualified.

SHIELDING

Impressive uniformity of light distribution with a high transmittance factor. Diffuser in frosted, opal PMMA.

ELECTRICAL

3000K 3500K 4000K 4500K 5000K

120V - 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.
Other dimming options, lumen options, 90CRI and lengths available.
Consult factory.

Specifications are subject to change.
Please confirm latest specifications prior to placing order.

ORDERING INFORMATION

PNLP	SIZE	WATTAGE	CCT	MV3 DRIVER
	14G = 1' x 4'	40W = 40 Watts	30K = 3000K	MV3 = 120V-347V Dimming (0-10V)
	22G = 2' x 2'		35K = 3500K	
		40K = 4000K		
		45K = 4500K		
		50K = 5000K		
	24G = 2' x 4'	45W = 45 Watts		
		70W = 70 Watts		

PROJECT:
 CAT.NO:
 NOTES:

DATE:
 TYPE:
 VOLTS:

PNLP


DIMENSIONS

2019-04-29


SIZE	L	W	H	H1	MTG L	MTG W
14G	4.00'	1.00'	0.40"	1.90"	43.25"	11.00"
22G	2.00'	2.00'	0.50"	1.75"	19.00"	22.75"
24G	4.00'	2.00'	0.50"	2.00"	37.00"	22.75"

SIZES

14G

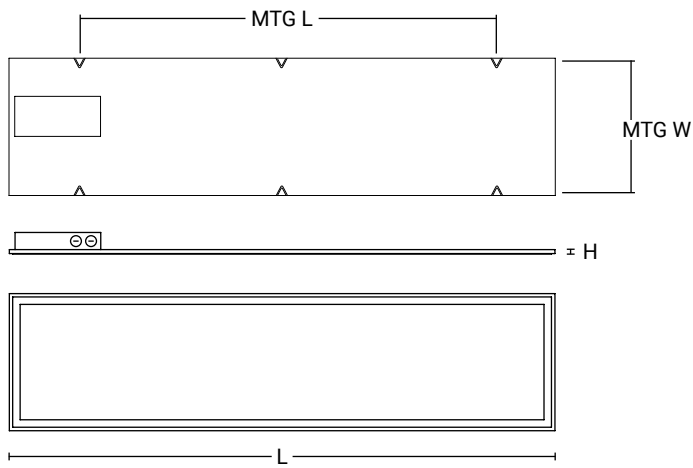

22G

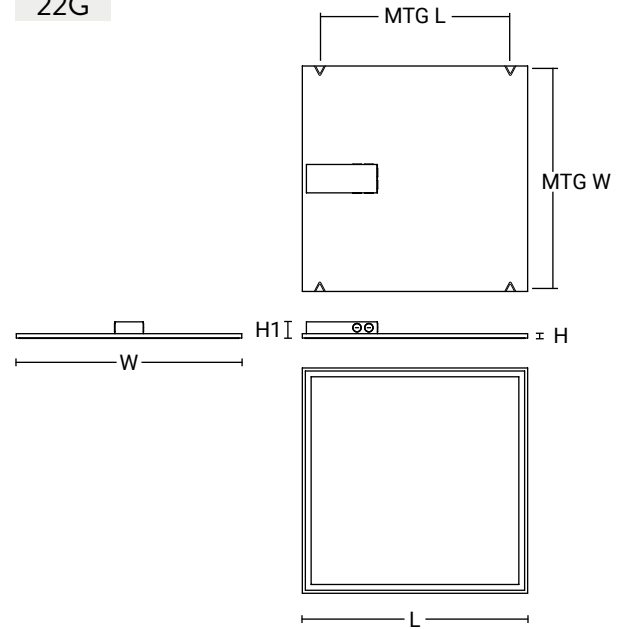

24G

