


PROJECT:  
CAT.NO:  
NOTES:

DATE:  
TYPE:  
VOLTS:

**ARCLUX**  
SERIES

# RQ1-0X

RQ . 1 opening



## GENERAL DESCRIPTION

**LED luminaire for surface or suspended** installation with aircraft cables. Provides a choice of direct or indirect light distribution allowing a superior quality of soft lighting.

Ideal for commercial or architectural environments.


Row mounting available, consult factory.

## CONSTRUCTION

One-piece body constructed from code gauge steel.

## SHIELDING

Frosted acrylic lens down and prismatic lens up (if required) supplied as standard.

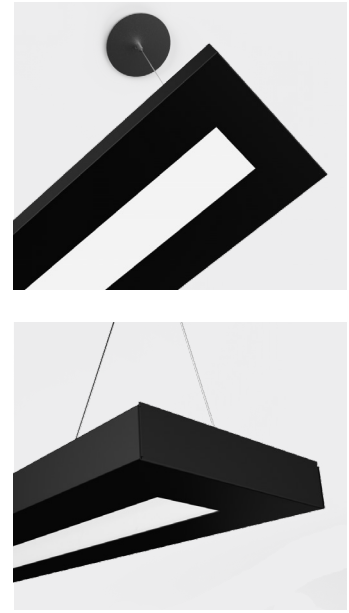

2019-05-09

## FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

## ELECTRICAL

3000K 3500K 4000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available. Consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\* Suitable for damp locations.



\*LED Five (5) year limited warranty. \*\*Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

Specifications are subject to change. Please confirm latest specifications prior to placing order.

## ORDERING INFORMATION

RQ1	OPENING	LENGTH	DISTRIBUTION	LUMENS	CCT	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
	02 = 2"	4 = 4ft	5U5 = 50% Up / 50% Down	32 = 3200lm	30K = 3000K	<b>GLOSSY</b>	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V Dimming (0-10V)
	03 = 3"		6U4 = 60% Up / 40% Down	40 = 4000lm	35K = 3500K	W = White Housing	A5 = 60in Aircraft Cable	C2 = 6ft Cord	347 = Standard 347V Dimming (0-10V)
	04 = 4"		4U6 = 40% Up / 60% Down	48 = 4800lm	40K = 4000K	B = Black Housing	A8 = 96in Aircraft Cable	C4 = 9ft Cord	*emergency driver available, consult factory
		8 = 8ft	7U3 = 70% Up / 30% Down	60 = 6000lm		G = Grey Housing			
			3U7 = 30% Up / 70% Down	64 = 6400lm		<b>MATTE</b>			
			DIR = 100% Down	80 = 8000lm		WM = White Housing	A12 = 144in Aircraft Cable	C7 = 13ft Cord	
			IND = 100% Up	96 = 9600lm		BM = Black Housing			
				120 = 120000lm		GM = Grey Housing			
						*other colours and finishes available, consult factory			
							*other cords and row mounting options available, consult factory		

PROJECT:  
CAT.NO:  
NOTES:

DATE:  
TYPE:  
VOLTS:

# RQ1



## DIMENSIONS

2019-04-10

SIZE	L	W	H	MTG L	MTG W
4FT	44.00"	8.50"	1.65"	41.00"	4.25"
8FT	92.25"	8.50"	1.65"	85.25"	4.25"

## SIZES

4FT

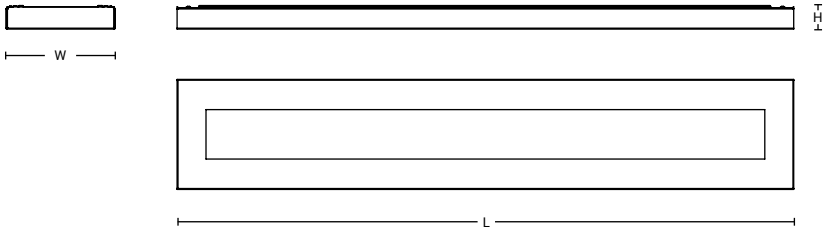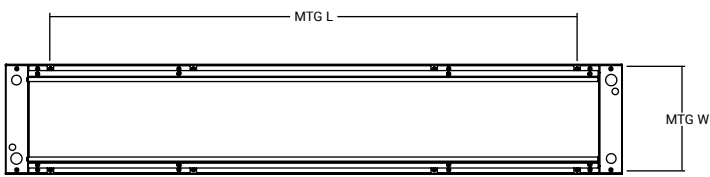

8FT

