

PROJECT:  
CAT.NO:  
NOTES:

DATE:  
TYPE:  
VOLTS:

**ARCLUX**  
SERIES

# RQ2

RQ . 2 openings





## GENERAL DESCRIPTION

**LED luminaire for surface or suspended** installation with aircraft cables. Provides a choice of direct or indirect light distribution allowing a superior quality of soft lighting.

Ideal for commercial or architectural environments.

Row mounting available, consult factory.

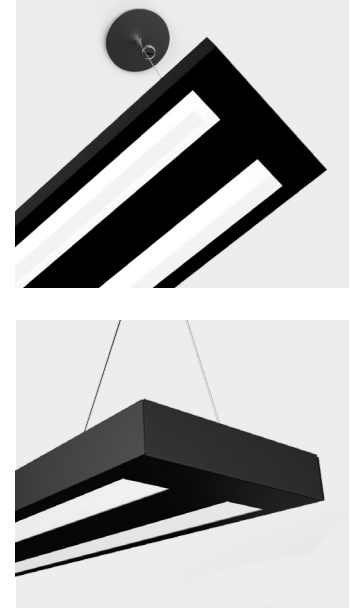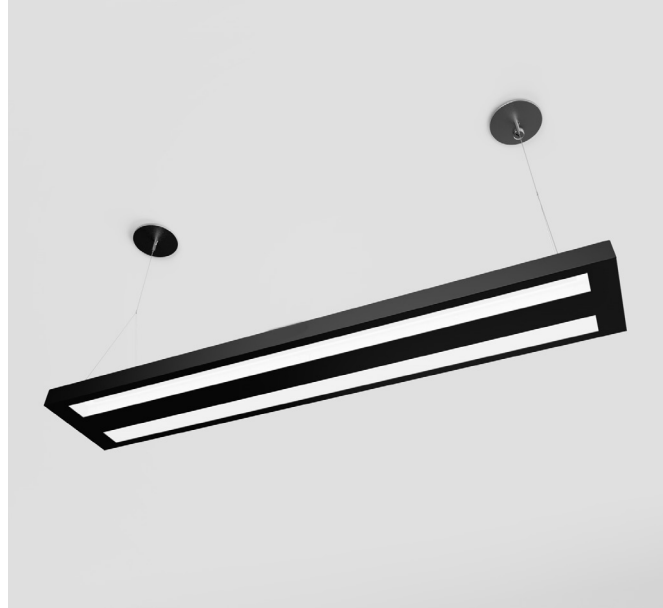

2019-05-09

## CONSTRUCTION

One-piece body constructed from code gauge steel.

## FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

## CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards\*\* Suitable for damp locations.



\*LED Five (5) year limited warranty.  
\*\*Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

## SHIELDING

Frosted acrylic lens down and prismatic lens up (if required) supplied as standard.

## ELECTRICAL

3000K   3500K   4000K

120V - 277V   347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.  
Other dimming options, lumen options, 90CRI and lengths available.  
Consult factory.

Specifications are subject to change.  
Please confirm latest specifications prior to placing order.

## ORDERING INFORMATION

RQ2	LENGTH	DISTRIBUTION	LUMENS	CCT	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER	
4 = 4ft		<b>5U5</b> = 50% Up / 50% Down	<b>32</b> = 3200lm <b>48</b> = 4800lm	<b>30K</b> = 3000K <b>35K</b> = 3500K <b>40K</b> = 4000K	<b>GLOSSY</b>  <b>W</b> = White Housing  <b>B</b> = Black Housing  <b>G</b> = Grey Housing	<b>A4</b> = 48in Aircraft Cable	<b>C1</b> = 5ft Cord	<b>MV</b> = Standard 120V-277V Dimming (0-10V)  <b>347</b> = Standard 347V Dimming (0-10V)	
		<b>6U4</b> = 60% Up / 40% Down			<b>MATTE</b>  <b>WM</b> = White Housing  <b>BM</b> = Black Housing  <b>GM</b> = Grey Housing	<b>A5</b> = 60in Aircraft Cable	<b>C2</b> = 6ft Cord		
8 = 8ft		<b>4U6</b> = 40% Up / 60% Down	<b>64</b> = 6400lm <b>96</b> = 9600lm		*other colours and finishes available, consult factory	<b>A8</b> = 96in Aircraft Cable	<b>C4</b> = 9ft Cord	*emergency driver available, consult factory	
		<b>7U3</b> = 70% Up / 30% Down					<b>A12</b> = 144in Aircraft Cable		<b>C7</b> = 13ft Cord
		<b>3U7</b> = 30% Up / 70% Down							
		<b>DIR</b> = 100% Down							
		<b>IND</b> = 100% Up							
						*other cords and row mounting options available, consult factory			

PROJECT:  
CAT.NO:  
NOTES:

DATE:  
TYPE:  
VOLTS:

# RQ2


## DIMENSIONS

2019-04-10

SIZE	L	W	H	MTG L	MTG W
4FT	44.00"	8.50"	1.65"	41.00"	4.25"
8FT	92.25"	8.50"	1.65"	85.25"	4.25"

## SIZES

4FT

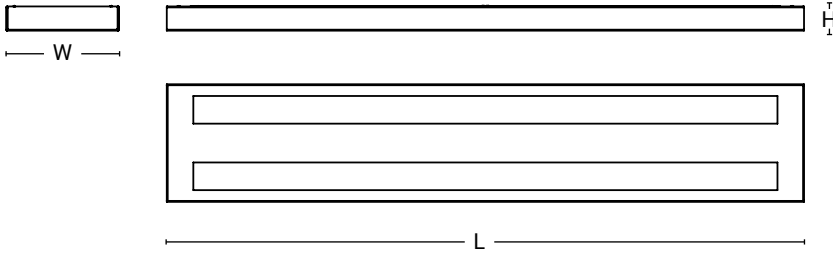

8FT

