

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

PEERLUX[®]
SERIES

SDL-3x-1ACF-205G

SDL / 1 Acrylic Frosted Lens / 205 Grid



RECESSED

GENERAL DESCRIPTION

LED luminaire for **recessed** installation in an exposed flat 15/16" T-grid ceiling.

For other grid ceiling, consult factory.

Designed to provide high performance lighting in a low profile housing.

Ideal for indoor lighting, retail spaces and other commercial environments.



2019-05-09

CONSTRUCTION

Rigid one-piece body die-formed of code gauge steel. Contoured steel reflector and frosted lens assembly is held within a hinged and latched frame.

SHIELDING

Extruded frost acrylic ribbed on inside.

FINISH

Standard finish is high gloss white polyester baked powder coat enamel.



Other colours available. Consult factory.

ELECTRICAL

3000K 3500K 4000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.
Other dimming options, lumen options, 90CRI and lengths available.
Consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.



*LED Five (5) year limited warranty.
**Normal temperature: -20 degrees Celsius to +25 degrees Celsius.

Specifications are subject to change.
Please confirm latest specifications prior to placing order.

ORDERING INFORMATION

SDL	1ACF	205G				
STYLE	SHIELDING	GRID	LUMENS	CCT	IE CONTROL *OPTIONAL*	DRIVER
3 = Static 4ft Troffer	1ACF = 1 Acrylic Frosted Lens	205G = 20" x 60" T-Bar Ceiling	32 = 3200lm	30K = 3000K 35K = 3500K 40K = 4000K	OC = On/Off Occupancy Control O5 = 100%-50% Hi/Low Occupancy Control	MV = Standard 120V-277V Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) *emergency driver available, consult factory
3A = Air Handling 4ft Troffer			36 = 3600lm			
3F = Static Full Troffer			40 = 4000lm			
3FA = Air Handling Full Troffer			44 = 4400lm			
			48 = 4800lm			
	52 = 5200lm					
	64 = 6400lm					

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

PEERLUX[®]
SERIES

SDL-3x-1ACF-205G


DIMENSIONS

2019-04-29

SIZE	L	W	H
205G	59.75"	19.90"	3.65"

SIZES

205G

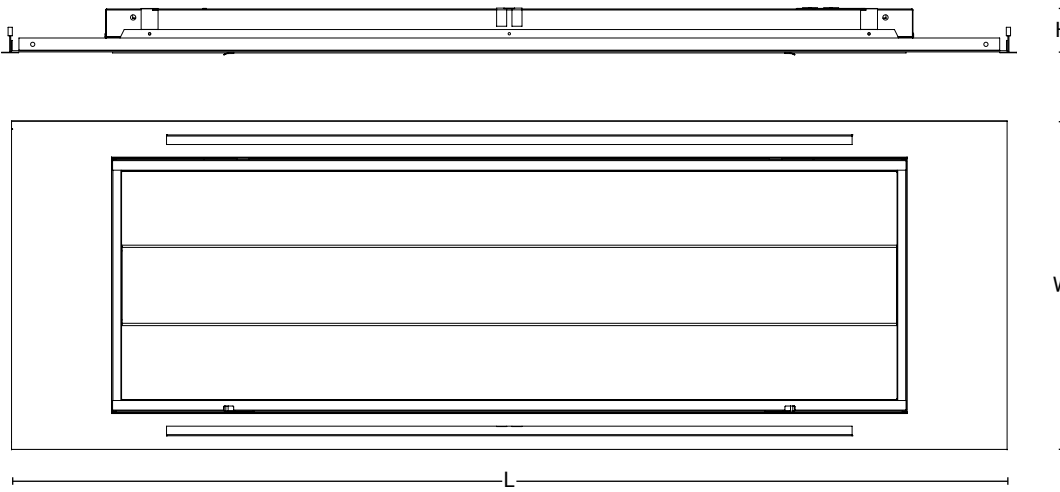

BOTTOM VIEW