

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

EVALUX
SERIES

SDLE-3-1ACF

SDL . Evalux . 1 Acrylic Frosted Lens



RECESSED

GENERAL DESCRIPTION

LED luminaire for **recessed** installation for 15/16" T-grid ceilings.

Ideal for indoor general area lighting, retail space and other commercial lighting.



2019-05-09

CONSTRUCTION

Rigid one-piece body die-formed of code gauge steel. Contoured steel reflector and frosted lens assembly is held within a hinged and latched frame.

FINISH

High gloss white polyester baked powder coat enamel.



CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**
Suitable for damp locations.



*LED Five (5) year limited warranty.
**Normal temperature: -20 degrees Celsius to +25 degrees Celsius.
***Not all available products are DLC qualified. Check the DLC Qualified Products List at designlights.org to confirm which versions are qualified.

SHIELDING

Extruded frosted acrylic lens ribbed on inside.

ELECTRICAL

3000K 3500K 4000K 5000K

120V - 277V 347V

L80 performance at 60,000 hours minimum. 80 CRI Standard.
Other dimming options, lumen options, 90CRI and lengths available.
Consult factory.

Specifications are subject to change.
Please confirm latest specifications prior to placing order.

ORDERING INFORMATION

SDLE	3	1ACF				
STYLE	SHIELDING	SIZE	WATTAGE	CCT	DRIVER	
	1ACF = 1 Acrylic Frosted Lens	22G = 2' x 2' T-Bar Ceiling	25W = 25 Watts	30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K	MV = Standard 120V-277V Dimming (0-10V) 347 = Standard 347V Dimming (0-10V)	
		24G = 2' x 4' T-Bar Ceiling	35W = 35 Watts			

PROJECT:
CAT.NO:
NOTES:

DATE:
TYPE:
VOLTS:

EVALUX[®]
SERIES

SDLE-3-1ACF


DIMENSIONS

2019-01-14

SIZE	L	W	H
22G	24.20"	23.50"	2.20"
24G	48.05"	23.50"	2.20"

SIZES

22G

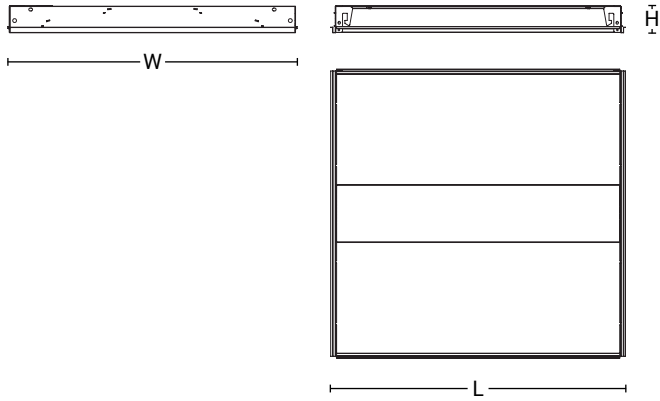

24G

