

EVALUX[®]
SERIES

SDLG-3-1ACF



PEERLESS[®]
electric-électrique

INCE|TION[®]
PEERLESS CANADA

CONCEPT

The SDLG-3-1ACF is a **LED luminaire** for **recessed** installation for 15/16" T-grid ceilings. Frosted acrylic lens with a rigid one-piece body constructed from code gauge steel with contoured steel reflector. Ideal for indoor general area lighting, retail space and other commercial lighting. Control available, consult factory. Field adjustments to be done on site.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.


Specifications are subject to change. Please confirm latest specifications prior to placing order.

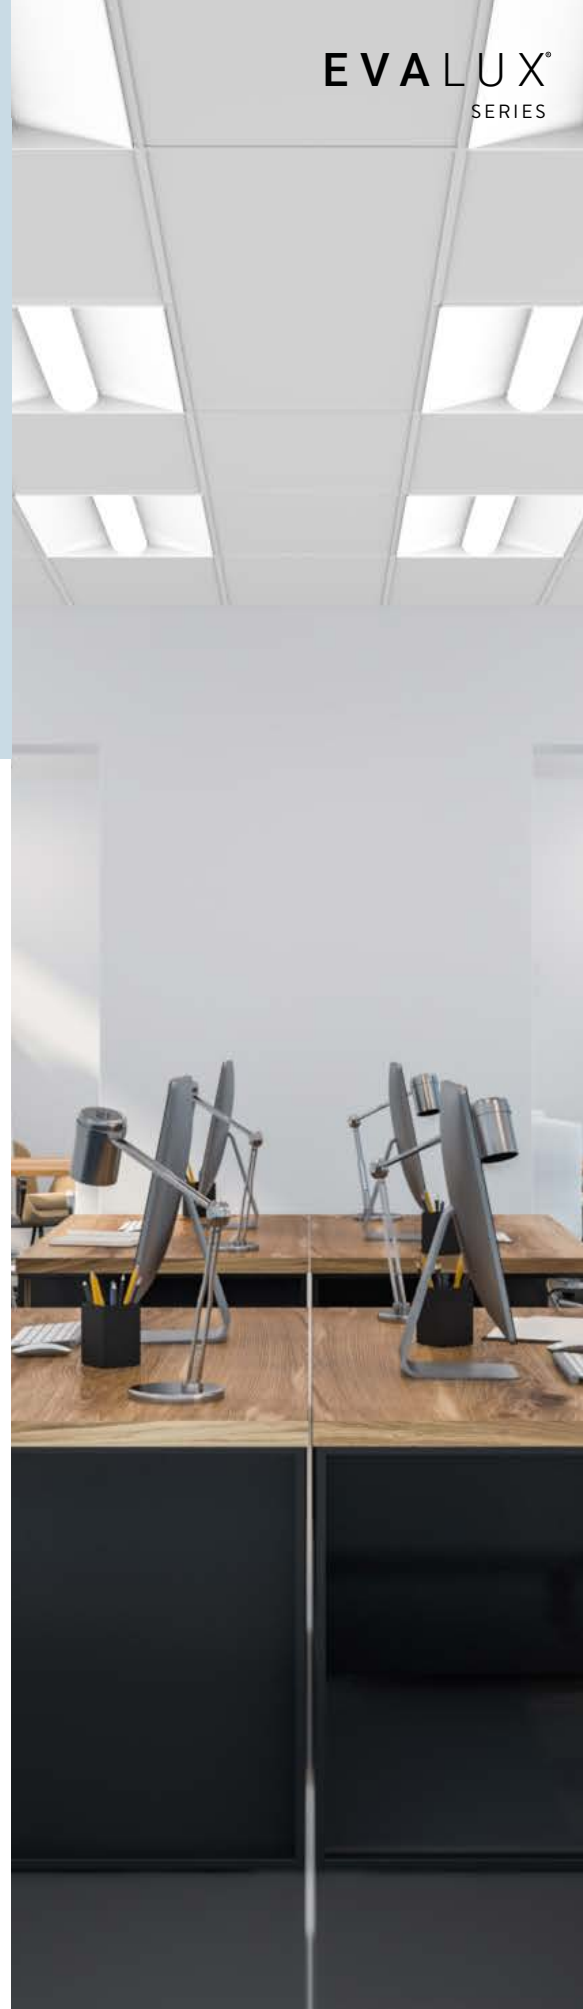

STRUCTURE

LED Driver
10% Dimming (0-10V).

Advanced Opticcs
Frosted acrylic lens.

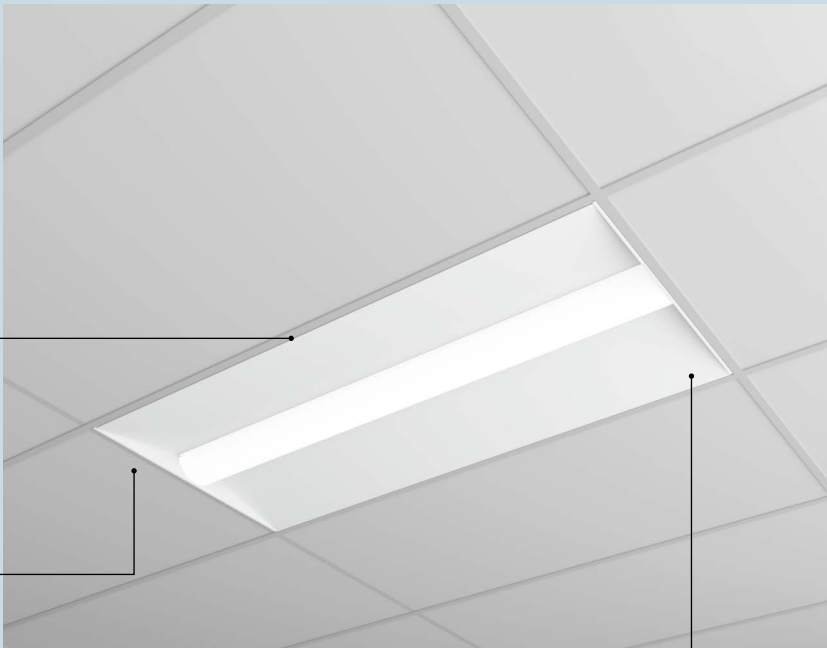

Body
Rigid one-piece body
constructed from code gauge
steel with contoured steel
reflector.

MOUNTING




RECESSED






PHOTOMETRIC DATA

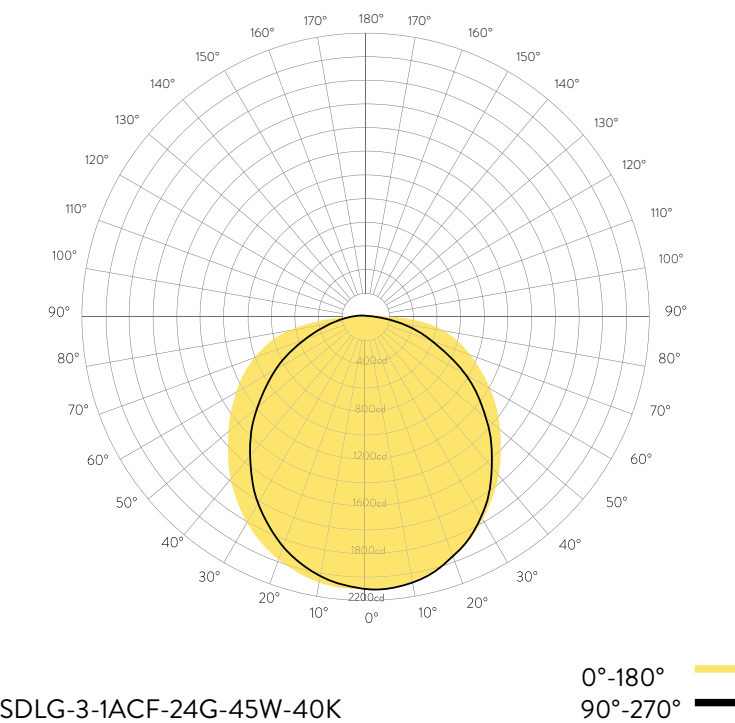



DIMENSIONS


SIZE	L	W	H
14G	47.70"	12.00"	4.00"
22G	23.75"	23.75"	2.35"
24G	47.70"	23.75"	2.35"

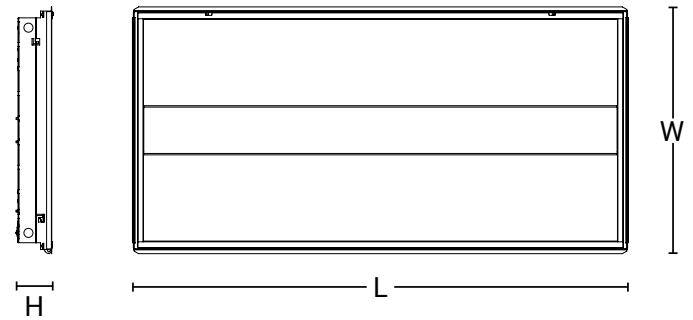

BOTTOM VIEW

ORDERING INFORMATION

SDLG-3	1ACF				MV3
FIXTURE	SHIELDING	SIZE	WATTAGE	CCT	DRIVER
SDLG-3 = SDL . G . 3	1ACF = 1 Acrylic Frosted Lens	14G = 1' x 4' T-Bar Ceiling	V36W = 36 Watts (SELECTABLE 24W, 30W, 36W)	V35K = 3500K (SELECTABLE 35K, 40K, 50K) 35K = 3500K 40K = 4000K	MV3 = Standard 120V-347V, 10% Dimming (0-10V)
		22G = 2' x 2' T-Bar Ceiling			
		24G = 2' x 4' T-Bar Ceiling	V45W = 45 Watts (SELECTABLE 35W, 40W, 45W)		



2900 Loyalist St.
Cornwall, ON
K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com