

PEERLUX[®]
SERIES



ITS





PEERLESS[®]
electric-électrique

INCEP[®]TION[®]
PEERLESS CANADA

CONCEPT

LED luminaire for **surface** or **suspended** installation with field adjustable aircraft cables or v-links for mounting chain. Rounded extruded ribbed frosted acrylic lens or polycarbonate frosted lens. Ideal for commercial environments or residential environments. Row mounting available, consult factory.

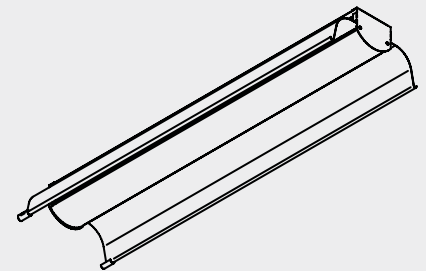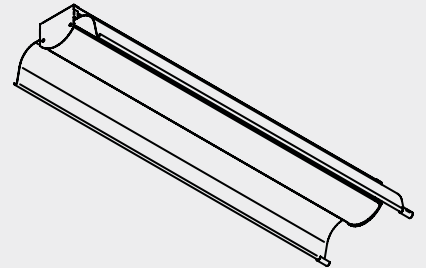


CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**


Suitable for damp locations.




*LED Five (5) year limited warranty. ***Complies with Buy American Act.
**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.
Specifications are subject to change. Please confirm latest specifications prior to placing order.

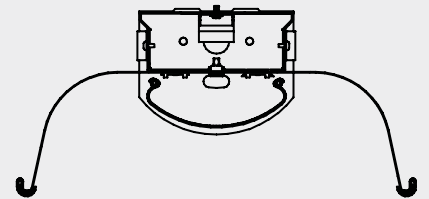


STRUCTURE

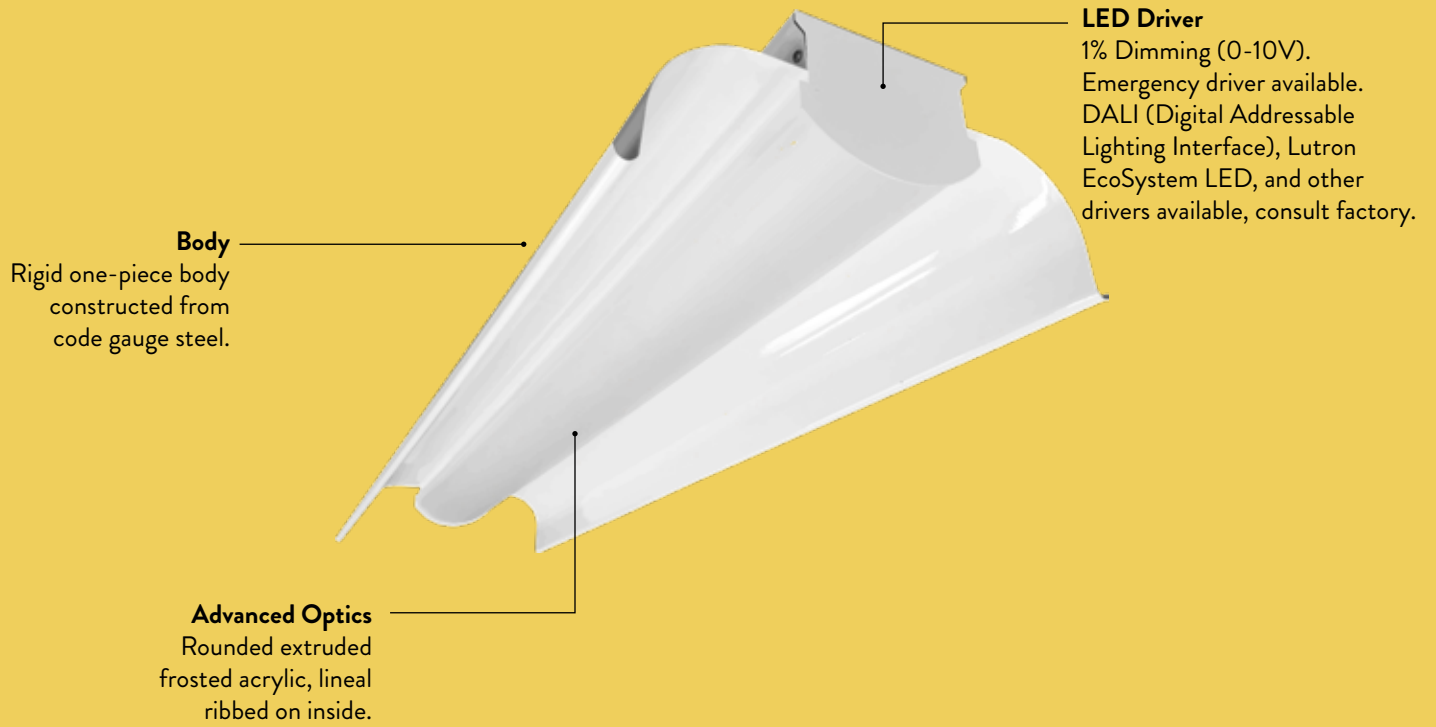

MOUNTING

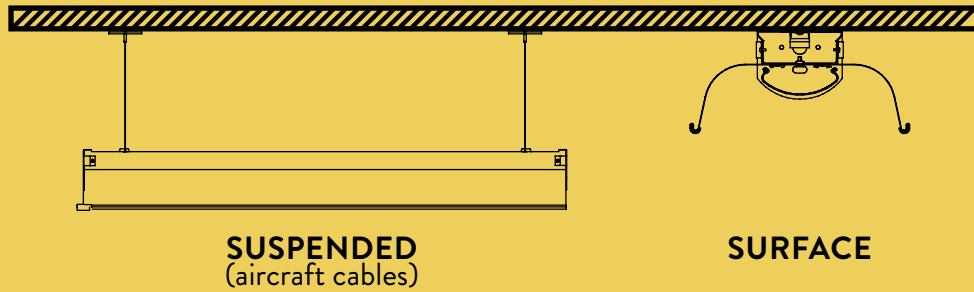


PHOTOMETRIC DATA

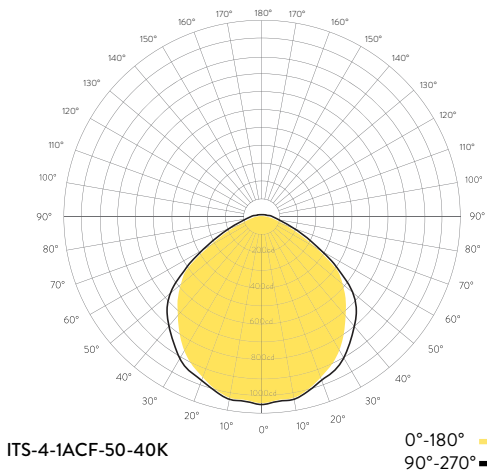




DIMENSIONS

SIZE	L	W	H
4FT	48.00"	13.50"	6.25"

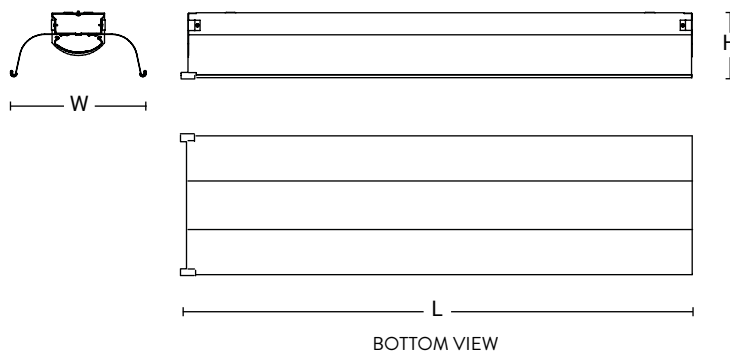

ORDERING INFORMATION

ITS	4				W			
FIXTURE	LENGTH	STYLE	LUMENS	CCT	FINISH	CONTROLS *OPTIONAL*	MOUNTING *OPTIONAL*	DRIVER
ITS = Industrial LED Strip	4 = 4ft	1ACF = 1 Acrylic Frosted Lens	32 = 3200lm 40 = 4000lm	30K = 3000K 35K = 3000K	GLOSSY W = White	OC = On/Off Occupancy Control O5 = 100%-50% Hi/ Low Occupancy Control Click here for suggested control options	A4-C1 = 48in Aircraft Cable & 5ft Cord A5-C2 = 60in Aircraft Cable & 6ft Cord A8-C4 = 96in Aircraft Cable & 9ft Cord A12-C7 = 144in Aircraft Cable & 13ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V) 347 = Standard 347V Dimming (0-10V) EM = Emergency Driver X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		1PCF = 1 Polycarbonate Frosted Lens	46 = 4600lm 60 = 6000lm 80 = 8000lm 100 = 10000lm *other lumens available	40K = 4000K 50K = 5000K				



OFFICE:

255-438 Isabey
St-Laurent, QC H4T 1V3
T: 514.595.1671
F: 514.595.4411

PRODUCTION:

2900 Loyalist Str.
Cornwall, ON K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com