

LDXR



PEERLESS®
electric-électrique

INCE|TION®
PEERLESS CANADA

CONCEPT

The LDXR is a **LED luminaire** for **recessed** installation. Custom **configurations, corners** and **patterns** available, consult factory.

Features a minimalistic and clean design providing a superior quality of lighting. Snap-in flat frosted acrylic lens and extruded aluminum body. Ideal for commercial or architectural environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty. ***Complies with Buy American Act.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

Specifications are subject to change. Please confirm latest specifications prior to placing order.

STRUCTURE

**LED Driver**

1% Dimming (0-10V).
Emergency driver available.
DALI (Digital Addressable
Lighting Interface), Lutron
EcoSystem LED, and other
drivers available, consult
factory.


Body

Extruded aluminum body.

Advanced Optics


Snap-in flat frosted
acrylic lens.

MOUNTING

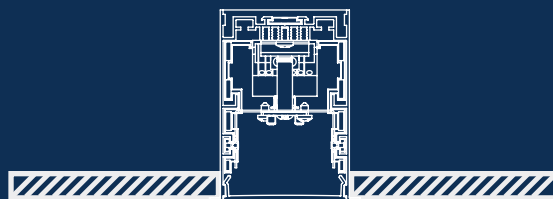


RECESSED

SEAMLESS CONTINUOUS RUNS
CREATE A LINEAR LIGHTING
ATMOSPHERE

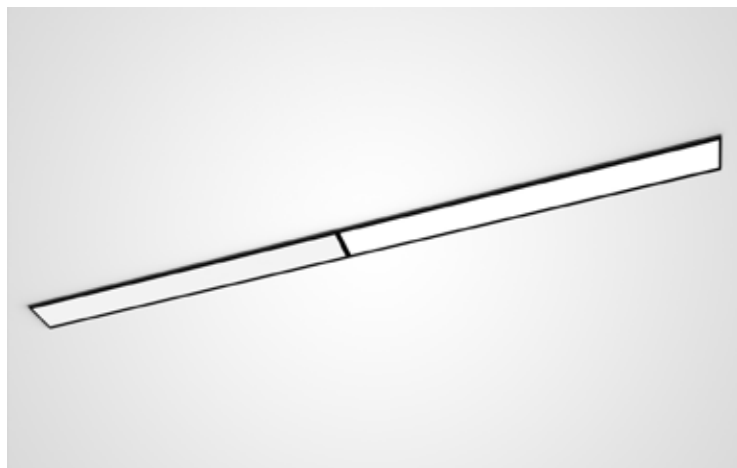


PHOTOMETRIC DATA

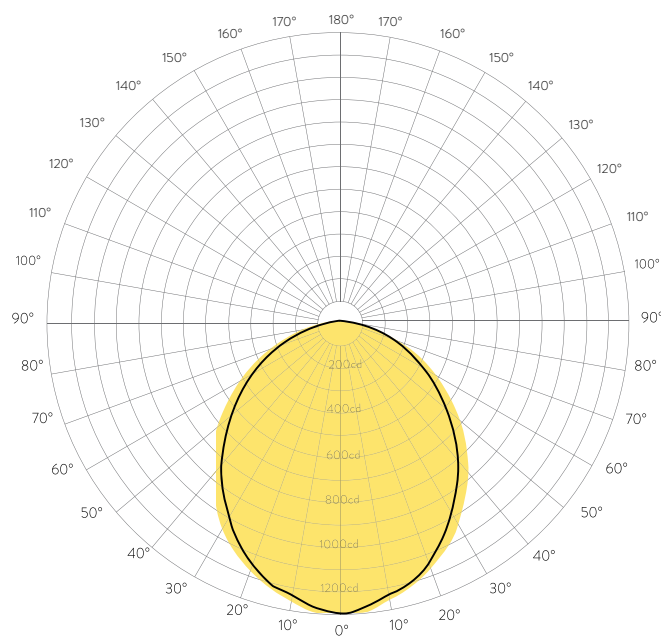

LDXR-60-8-80-35K

0°-180° —
90°-270° —

Available in 3000K, 3500K, 4000K and 5000K preset CCT

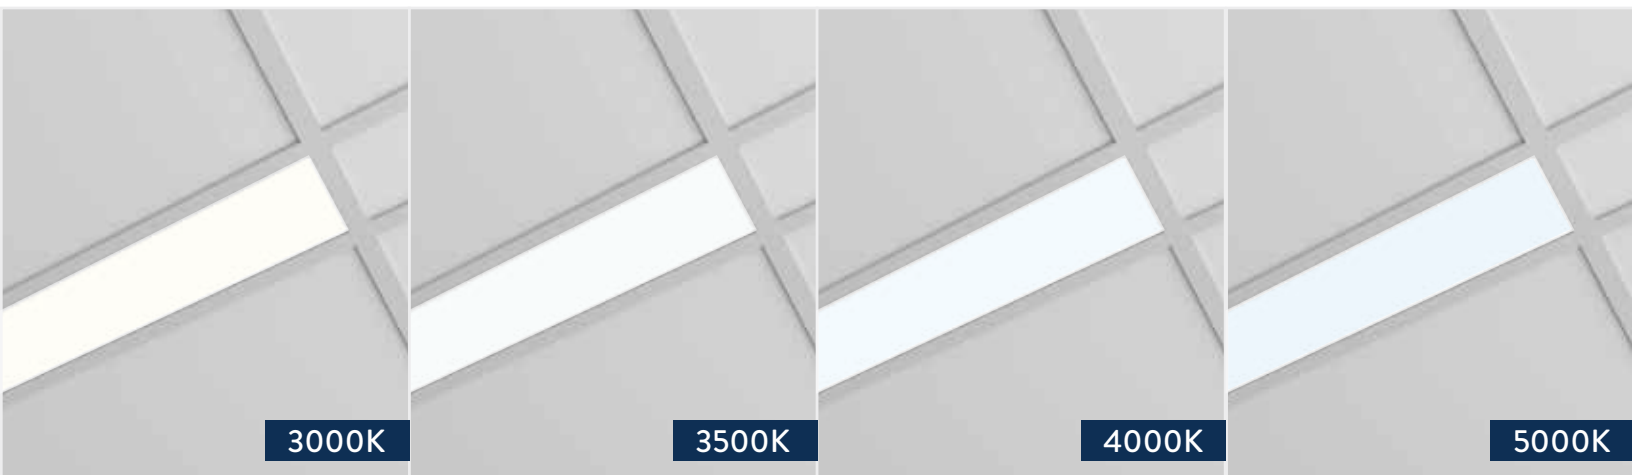

OR

AS TUNABLE WHITE





DIMENSIONS

LDXI-40


SIZE	L	W	H	MTG L	MTG W
2FT	23.75"	1.55"	3.15"	24.00"	2.50"
4FT	47.75"	1.55"	3.15"	48.00"	2.50"
6FT	71.75"	1.55"	3.15"	72.00"	2.50"
8FT	95.75"	1.55"	3.15"	96.00"	2.50"

LDXI-60

SIZE	L	W	H	MTG L	MTG W
2FT	23.75"	2.35"	3.40"	24.00"	3.25"
4FT	47.75"	2.35"	3.40"	48.00"	3.25"
6FT	71.75"	2.35"	3.40"	72.00"	3.25"
8FT	95.75"	2.35"	3.40"	96.00"	3.25"


LDXI-95

SIZE	L	W	H	MTG L	MTG W
2FT	23.75"	3.75"	3.95"	24.00"	4.75"
4FT	47.75"	3.75"	3.95"	48.00"	4.75"
6FT	71.75"	3.75"	3.95"	72.00"	4.75"
8FT	95.75"	3.75"	3.95"	96.00"	4.75"



ORDERING INFORMATION

LDXR						FA	
FIXTURE	WIDTH	LENGTH	MOUNTING	LUMENS	CCT	SHIELDING	DRIVER
LDXR =	40 =	2 =	T =	80 =	30K =	FA =	MV =
Linear .	40mm (1.57")	2ft	Trim t-bar 15/16"	800lm/ft	3000K	Flat Frosted Acrylic (Snap-in)	Standard 120V-277V, 1% Dimming (0-10V)
Direct .	60 =	4 =	TD =	100 =	35K =		347 =
Recessed	60mm (2.36")	4ft	Trim Drywall	1000lm/ft	3500K		Standard 347V Dimming (0-10V)
	95 =	6 =	TL =	120 =	40K =		EM =
	95mm (3.74")	6ft	Trimless Drywall	1200lm/ft	4000K		Emergency Driver
		8 =	X =		50K =		X =
		8ft	custom configurations, corners and patterns available, consult factory		5000K		DALI, Lutron EcoSystem LED, and other drivers available, consult factory
		X =			TW =		
		row mounting available, consult factory			Tunable White		
					*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory		



2900 Loyalist St.
Cornwall, ON
K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com