

ARCLUX[®]
SERIES

RINA



PEERLESS[®]
electric-électrique

INCE|PTION[®]
PEERLESS CANADA

CONCEPT

The RINA is a **LED luminaire** for **suspended** installation with aircraft cables. Features a minimalistic and clean design providing a superior quality of lighting. Snap-in flat frosted acrylic lens and extruded aluminum body. Ideal for commercial or architectural environments. Row mounting available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty. ***Complies with Buy American Act.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.




Specifications are subject to change. Please confirm latest specifications prior to placing order.




STRUCTURE

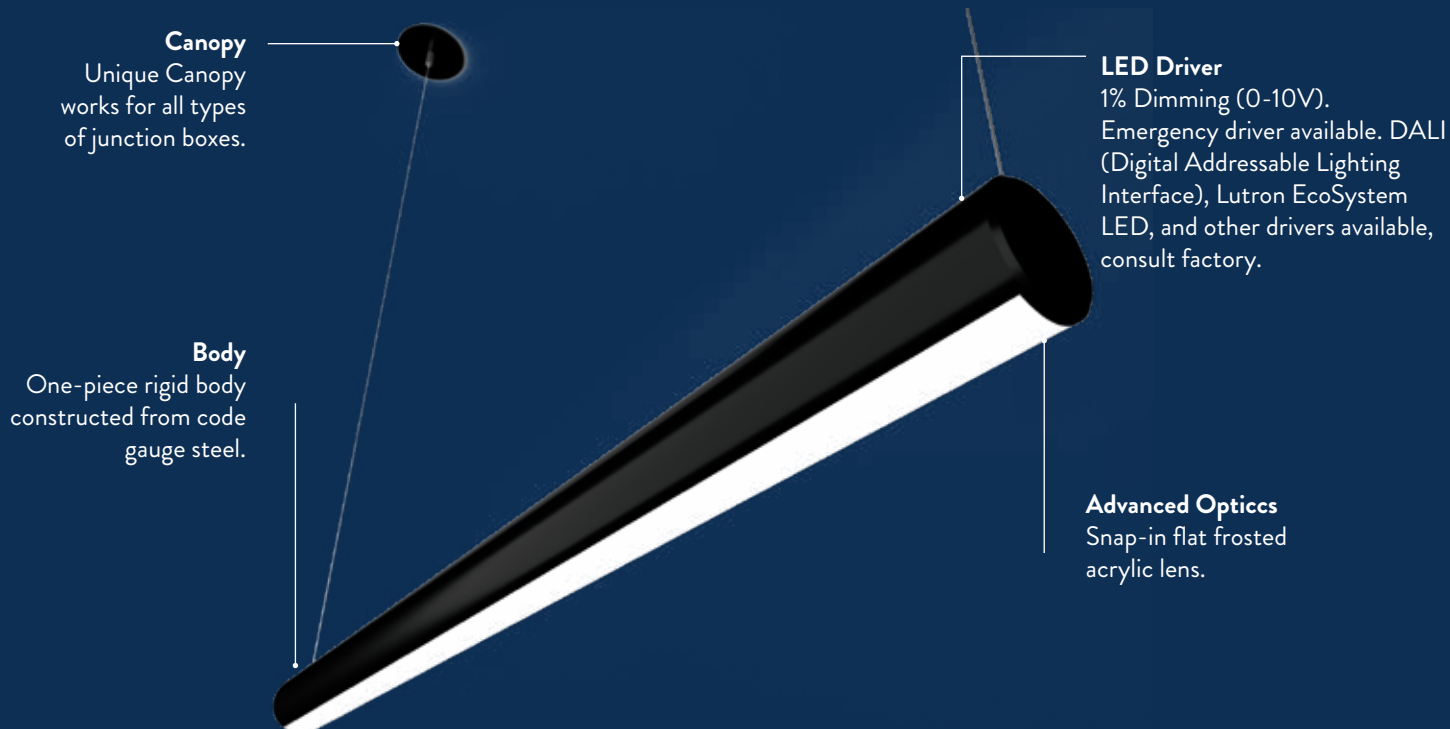


MOUNTING

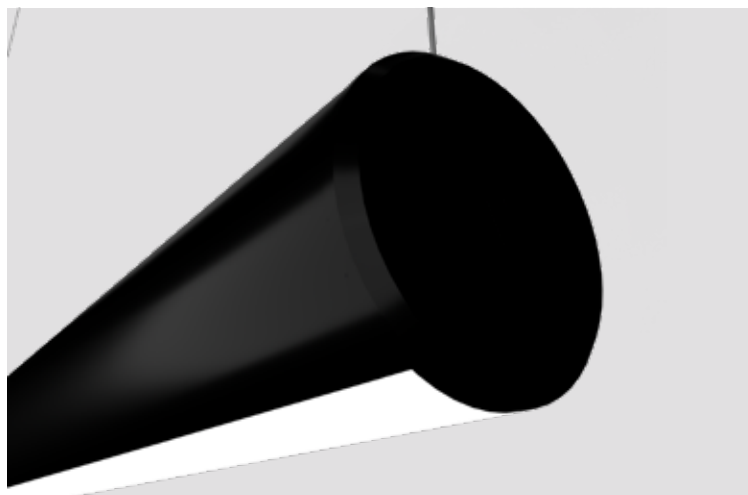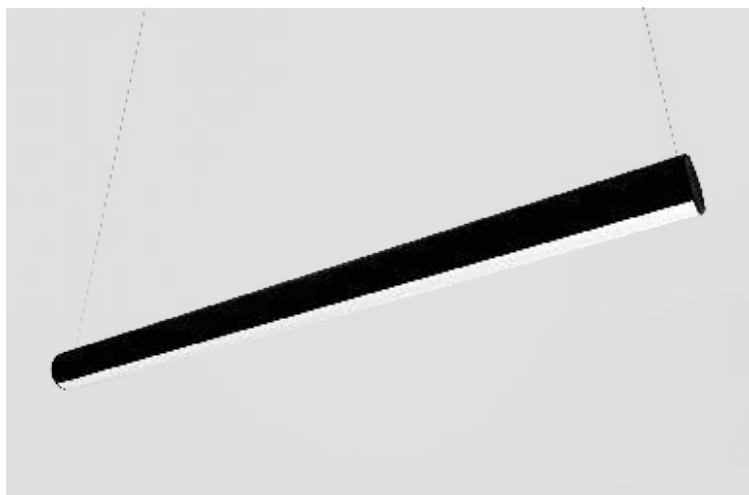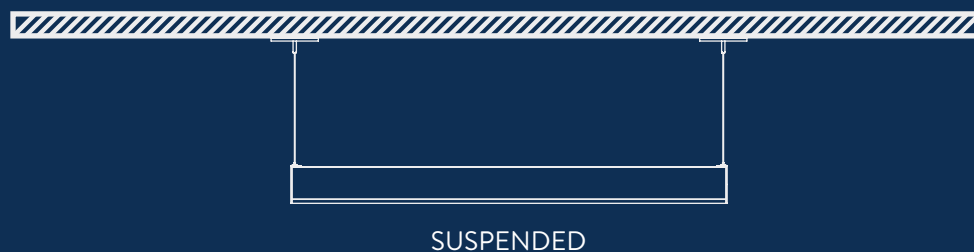

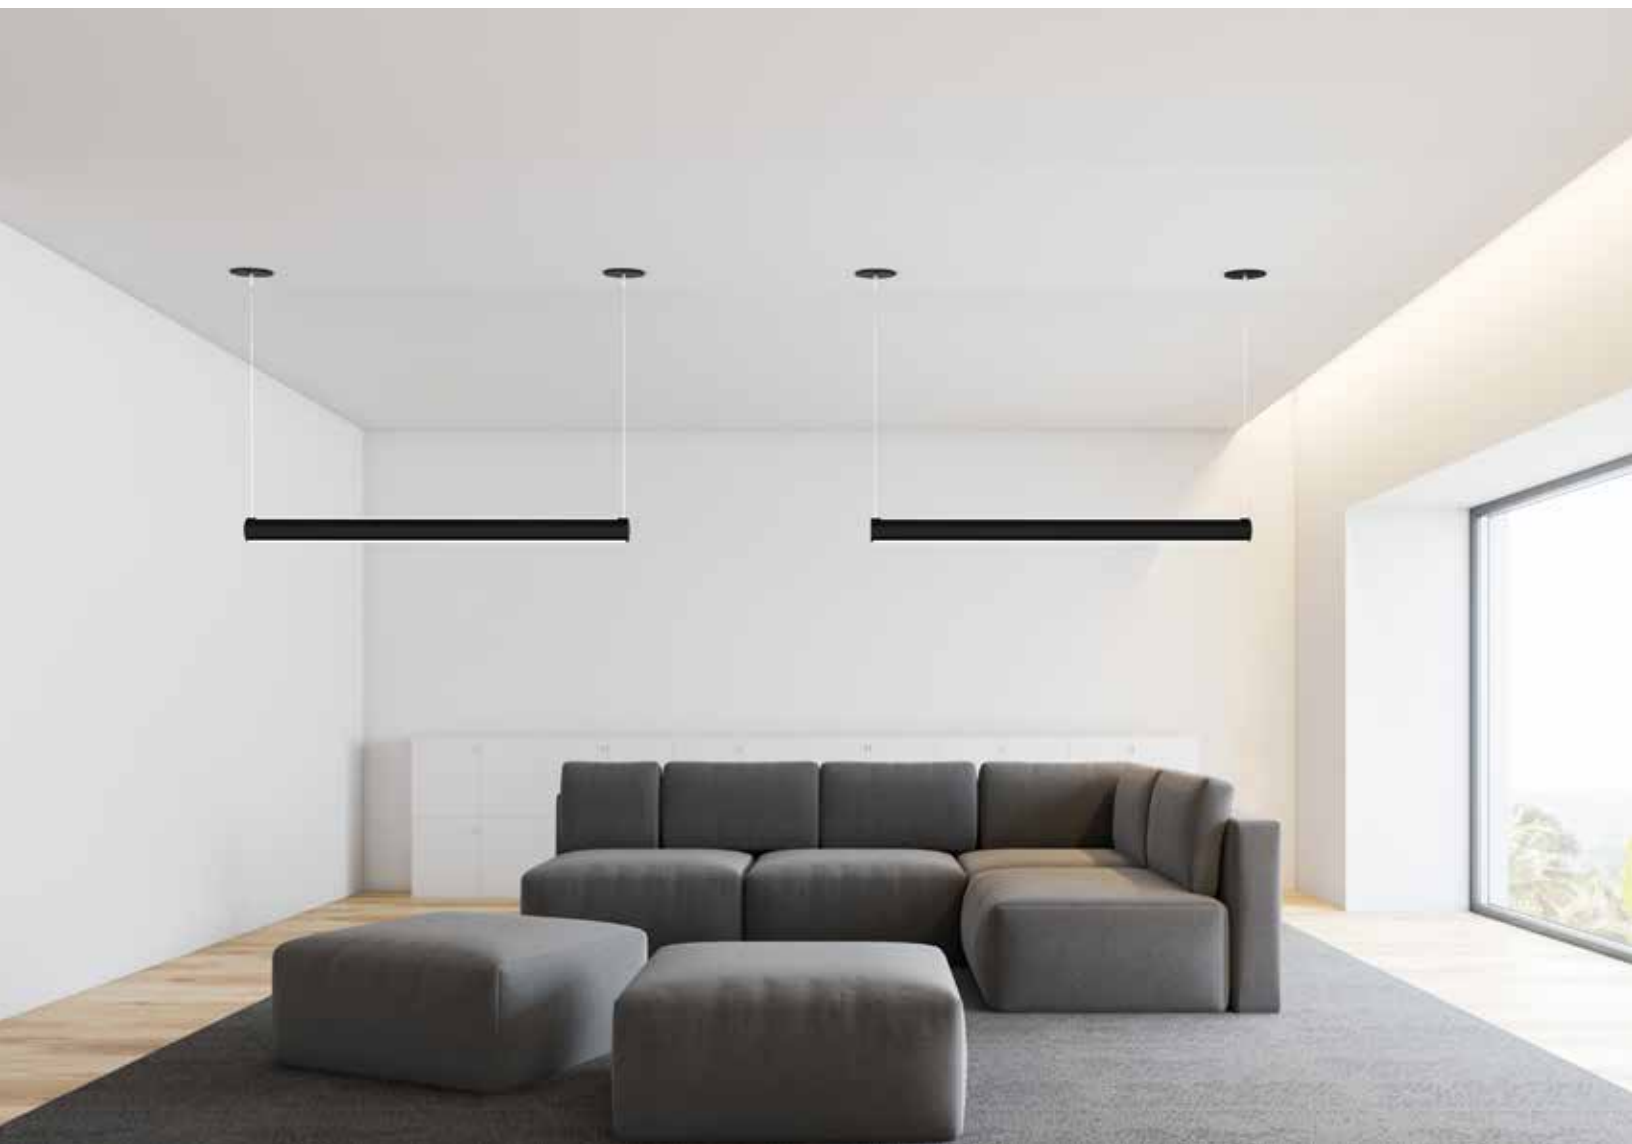


Available in 3000K, 3500K, 4000K and 5000K preset CCT

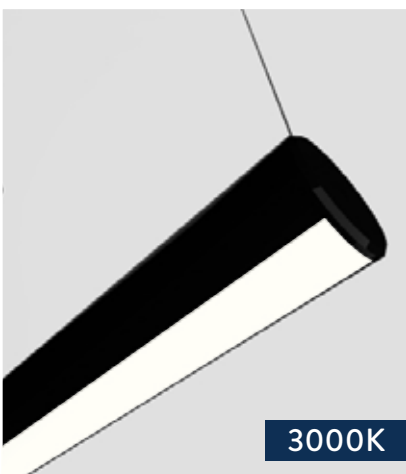


3000K



3500K

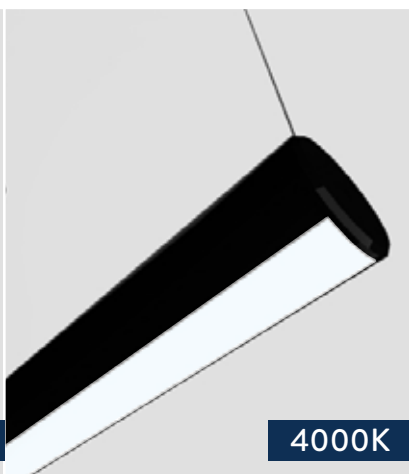


4000K

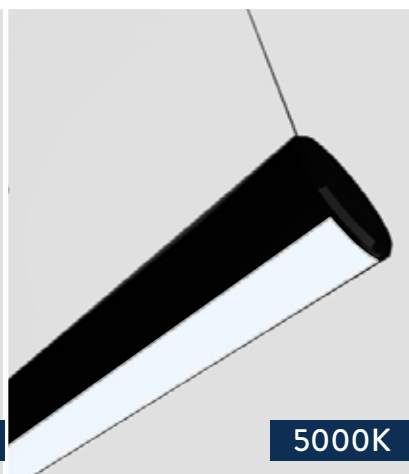


5000K

OR

AS TUNABLE WHITE

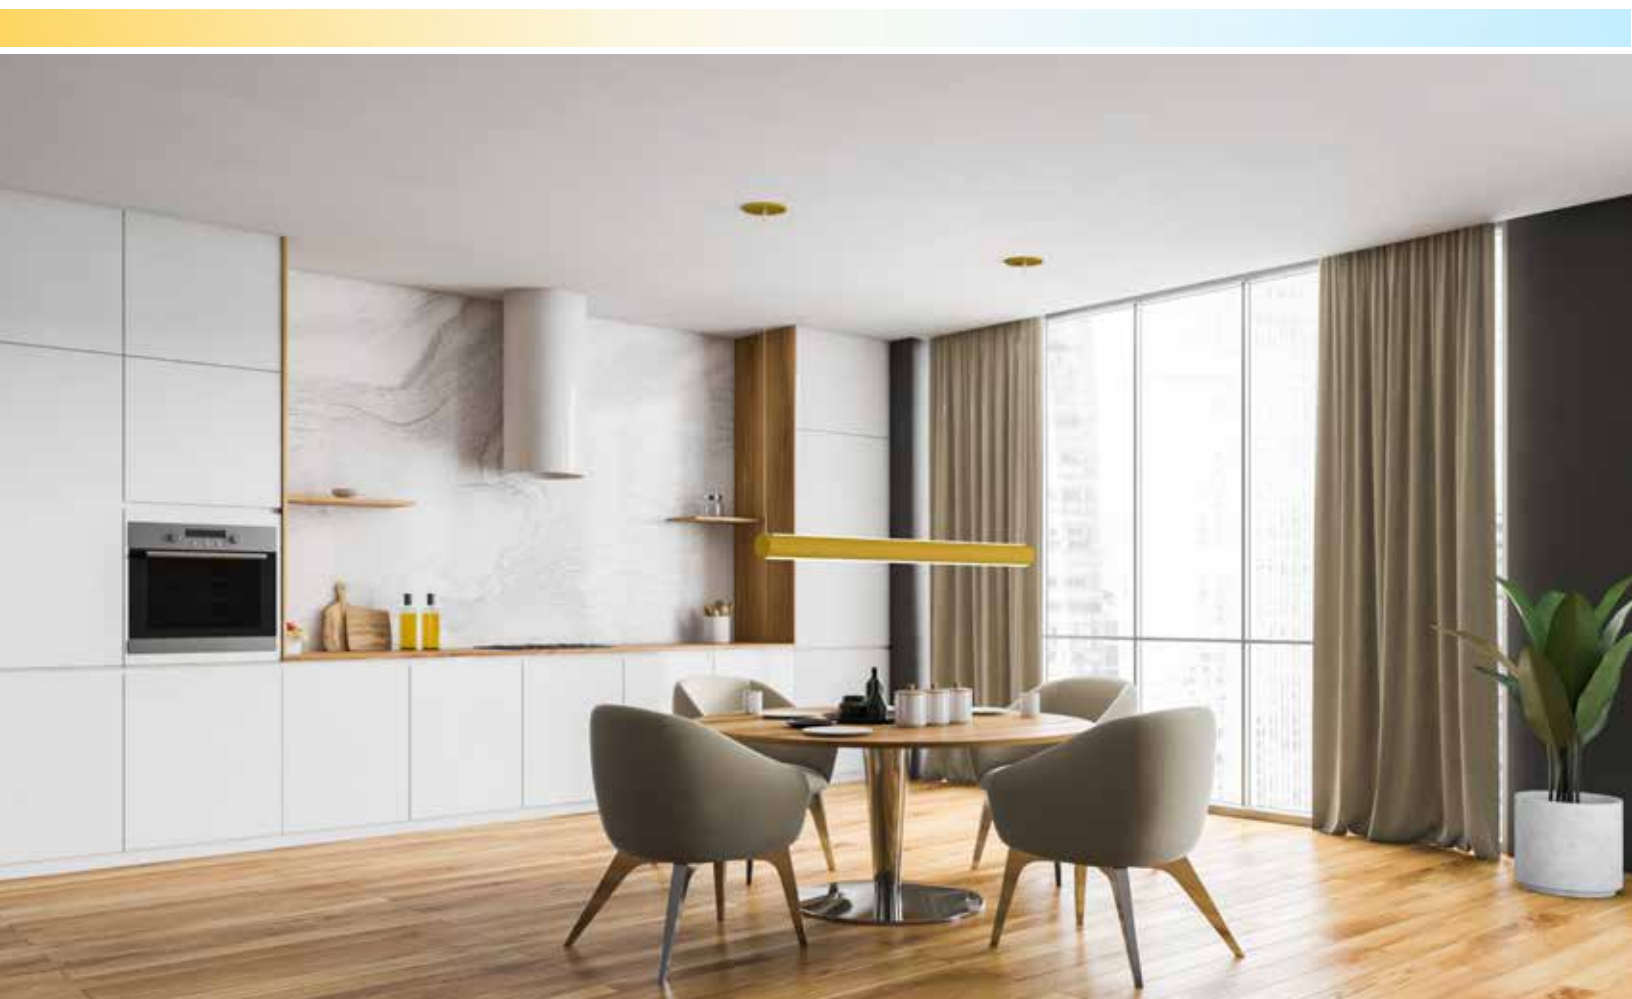


CUSTOM COLORS

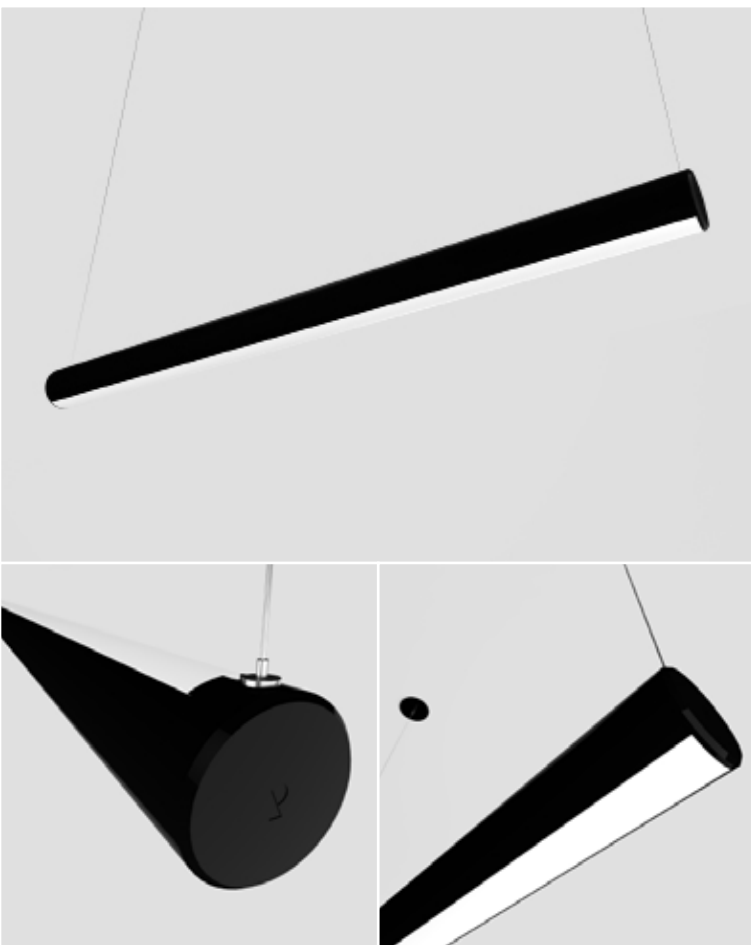


DIMENSIONS

SIZE	L	W	H	MTG L
2FT	23.50"	4.00"	4.00"	22.38"
4FT	46.20"	4.00"	4.00"	45.38"
6FT	70.50"	4.00"	4.00"	69.38"
8FT	92.20"	4.00"	4.00"	91.38"

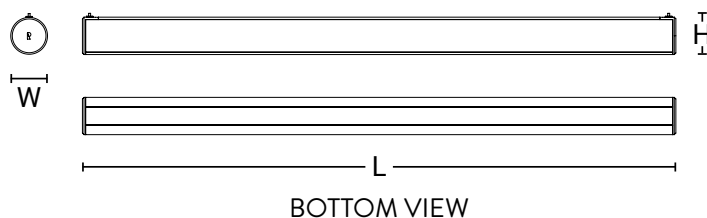

ORDERING INFORMATION

RINA					FA				
FIXTURE	DISTRIBUTION	LENGTH	LUMENS	CCT	SHIELDING	FINISH	MOUNTING *OPTIONAL*	POWER CORD *OPTIONAL*	DRIVER
RINA = Round . Indirect . Direct . Architectural	5U5 = 50% Up / 50% Down	2 = 2FT	50 = 500lm/ft	30K = 3000K	FA = Snap-in Flat Frosted Acrylic	GLOSSY W = White Housing	A4 = 48in Aircraft Cable	C1 = 5ft Cord	MV = Standard 120V-277V, 1% Dimming (0-10V)
	6U4 = 60% Up / 40% Down	4 = 4FT	80 = 800lm/ft	35K = 3500K		B = Black Housing	A5 = 60in Aircraft Cable	C2 = 6ft Cord	
	4U6 = 40% Up / 60% Down	6 = 6FT	100 = 1000lm/ft	40K = 4000K		G = Grey Housing	A8 = 96in Aircraft Cable	C4 = 9ft Cord	EM = Emergency Driver
	7U3 = 70% Up / 30% Down	8 = 8FT	120 = 1200lm/ft	50K = 5000K		MATTE WM = White Housing	A12 = 144in Aircraft Cable	C7 = 13ft Cord	
	3U7 = 30% Up / 70% Down		150 = 1500lm/ft	TW = Tunable White		BM = Black Housing	X = row mounting available, consult factory		X = DALI, Lutron EcoSystem LED, and other drivers available, consult factory
	DIR = 100% Down		*not applicable for direct light distribution	*Other CCT, RGB (Red, Green, Blue LEDs), DM (dim to warm) available, consult factory		GM = Grey Housing			
IND = 100% Up *Custom distribution available, consult factory *Batwing available, consult factory						X = other colours and finishes available, consult factory			



2900 Loyalist St.
Cornwall, ON
K6H 6C8
T: 613.510.1268
F: 613.510.1268

info@peerless-electric.com
Peerless-Electric.com